

# LETO 11 Mini WM UD

WALL MOUNT DIRECT AND INDIRECT LED LIGHT



**Leto 11 Mini WM UD - Wall Mount Direct/Indirect LED Light.** Leto 11 Mini WM UD is a wall mounted cylinder LED fixture designed to provide a space with indirect up and down lighting.

## Ordering Code

Fixture	<b>653</b>								
	1	2	3	4	5	6	7	8	9
Driver					--	--			
	1	2	3	4	5	6			

## Product Specifications

**SAMPLE:** Fixture **653 - S - A90 - 617 - 27 - 0505 - 00 - 08 - 01** | Driver **955 - 08 - STD - 120 - A90 - 0505**

1 - Model	2 - Size	3 - CRI/LED	4 - Optic Direct	5 - CCT	6 - Lumen <sup>*1/2</sup>	7 - Accessory
<b>653</b> · Leto 11 Mini UD Pendant	<b>S</b> · Small (73mm) <sup>*1</sup> <b>M</b> · Medium (209mm) <b>L</b> · Large (346mm)	<b>A90</b> · Accuracy	<b>617</b> · 17° <b>624</b> · 24° <b>660</b> · 60° <i>No optic on up light</i>	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<i>Direct / Indirect</i> <b>0505</b> · 500/500 (9.4W) <b>1010</b> · 1000/1000 (20.2W)	<b>00</b> · No Accessory <b>DL</b> · Diffusing Lens <b>HO</b> · Honeycomb <sup>*3</sup> <i>Fixed Diffusing Lens on indirect optic</i>

8 - Body Color		9 - Baffle Color		1 - Canopy Style	2 - Canopy Color	
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	<b>955</b> · Round Slim <sup>*4</sup> <b>954</b> · Round Semi-Recessed	<i>Standard</i>	<i>Premium</i>
<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver	<b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver	<b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL		<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver	<b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL

3 - Driver		Dim Level		4 - Voltage	5 - CRI/LED	6 - Lumen
<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase <sup>*5</sup> <b>ELDOLC</b> · EldoLED 0 - 10 Volt <sup>*4</sup>	N/A 1% 1% 0.1%	<b>DALI</b> · Dali Protocol <sup>*4</sup> <b>LUTES</b> · Hilume Ecodigital <sup>*4</sup> <b>LUT2W</b> · 2 Wire for phase <sup>*5/4</sup> <b>LUT5S</b> · 5 Series Eco System <sup>*4</sup>	0.1% 1% 1% 5%	<b>120</b> · 120V <b>277</b> · 277V	Same as Fixture	Same as Fixture

\*1 small limited to 500lm direct/500lm indirect

\*2 total wattage of direct and indirect

\*3 not available with small size

\*4 remote mount driver

\*5 120V only

# LETO 11 Mini W M UD

WALL MOUNT LED DOWNLIGHT



## Light Engine

- Output:** up to 2000lm
- High Efficacy:** up to 100 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

## Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety

## Installation


- Pre-assembled for quick installation
- Low profile against the wall gives a floating appearance

## Construction



- Machined aluminum construction
- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Made in Canada

## Canopy

### 955 - Round Slim

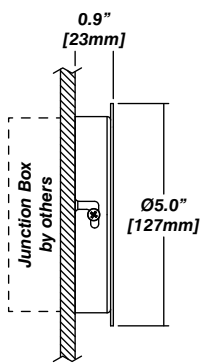


### 954 - Semi-Recessed + Cylinder Driver Housing

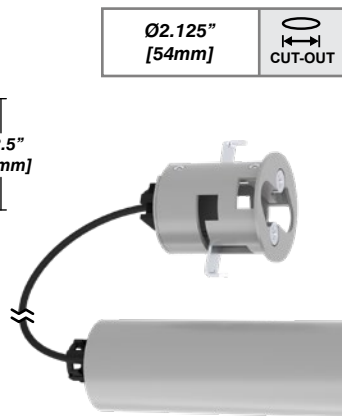


## Dimensions


### L - Large

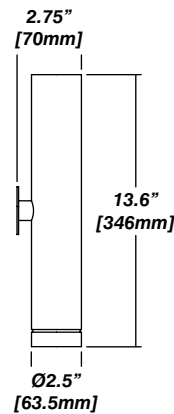

### M - Medium

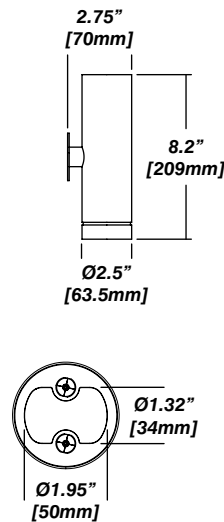

### S - Small

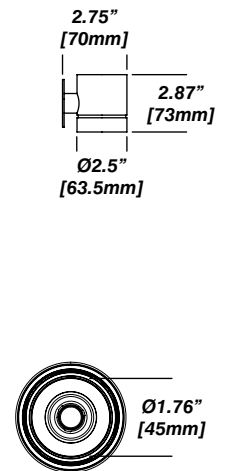


## Accessories

### Frosted Lens



### Honeycomb

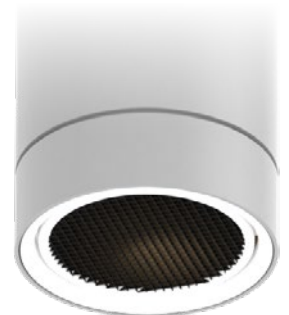

# LETO 11 Mini WM UD


WALL MOUNT LED DOWNLIGHT





## Senso Driver Housings

### 910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






## Dimensions

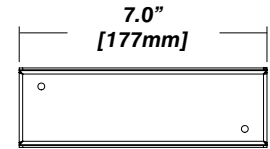




### 910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location

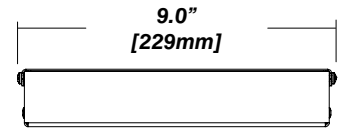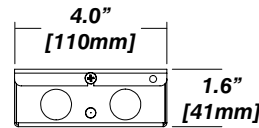

### 954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy

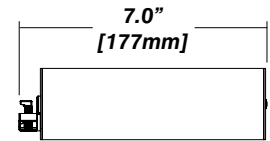

## 954 Driver Layouts


### 954 with Cylinder Driver Housing

- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing



### 954 with Cylinder Driver Housing + 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

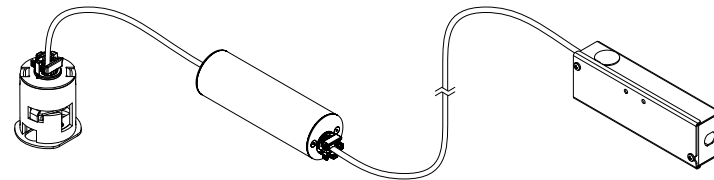

### 954 with Cylinder Driver Housing + 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

