

LETO 11 Mini WM

WALL MOUNT LED DOWNLIGHT



Leto 11 Mini WM - Wall Mount LED Downlight. Leto 11 Mini WM is a small wall mounted cylinder LED fixture designed to provide a space with discrete direct lighting. It is the perfect solution for creating subtle light in your space.

Ordering Code

Fixture	652								
	1	2	3	4	5	6	7	8	9
Driver					--	--			
	1	2	3	4	5	6			

Product Specifications

SAMPLE: Fixture **652 - S - A90 - 617 - 27 - 07 - 08 - 02** | Driver **951 - 01 - STD - 120 - A90 - 07**

1 - Model	2 - Size	3 - CRI/LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory ^{*1}
652 · Leto 11 Mini Wall Mount	S · Small (73mm) ^{*1/2} M · Medium (209mm) L · Large (346mm)	A90 · Accuracy	617 · 17° 624 · 24° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	07 · 700 (6W) 10 · 1000 (9W) 15 · 1500 (14W)	00 · No Accessory DL · Diffusing Lens HO · Honeycomb

8 - Body Color		9 - Baffle Color		1 - Canopy Style	2 - Canopy Color	
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	955 · Round Slim ^{*2} 954 · Round Semi-Recessed	<i>Standard</i>	<i>Premium</i>
01 · White 02 · Black 08 · Silver	52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	01 · White 02 · Black 08 · Silver	52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL		01 · White 02 · Black 08 · Silver	52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL

3 - Driver ^{*2}		Dim Level	Dim Level	4 - Voltage	5 - CRI/LED	6 - Lumen
STD · Non Dimming	N/A	DALI · Dali Protocol ^{*4}	0.1%	120 · 120V 277 · 277V	Same as Fixture	Same as Fixture
LCS · 0 - 10 Volt Protocol	1%	LUTES · Hilume Ecodigital ^{*4}	1%			
DIM · Phase ^{*3}	1%	LUT2W · 2 Wire for phase ^{*3/4}	1%			
ELDOLC · EldoLED 0 - 10 Volt ^{*4}	0.1%	LUT5S · 5 Series Eco System ^{*4}	5%			

*1 accessories not available with small size

*2 small size always remote mount driver

*3 120V only

*4 remote mount

LETO 11 Mini W/M

WALL MOUNT LED DOWNLIGHT



Light Engine

- Output:** up to 1500lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

Installation


- Pre-assembled for quick installation
- Low profile against the wall gives a floating appearance

Construction


- Machined aluminum construction
- Powder coated in standard or premium finishes
- Made in Canada

Dimensions


L - Large

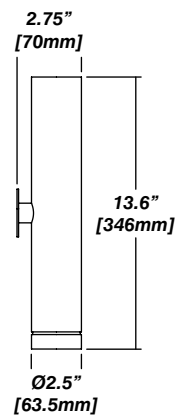

M - Medium




S - Small






Canopy

955 - Round Slim

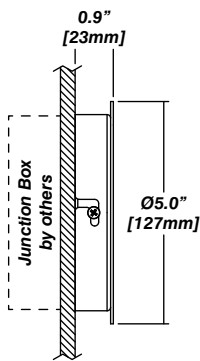

954 - Semi-Recessed + Cylinder Driver Housing

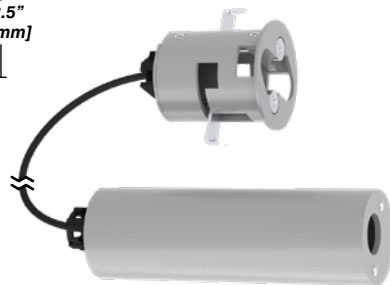

Accessories

Frosted Lens



Honeycomb



LETO 11 Mini WM


WALL MOUNT LED DOWNLIGHT





Senso Driver Housings

910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






Dimensions





910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location



954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy



954 Driver Layouts


954 with Cylinder Driver Housing

- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing



954 with Cylinder Driver Housing + 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

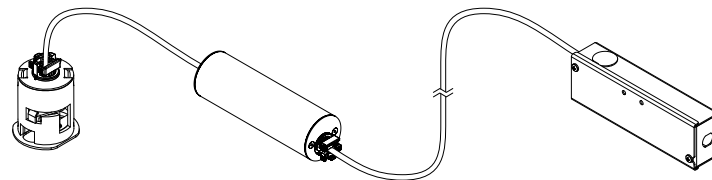

954 with Cylinder Driver Housing + 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

