


# LETO 11

## WALL MOUNT LED CYLINDER

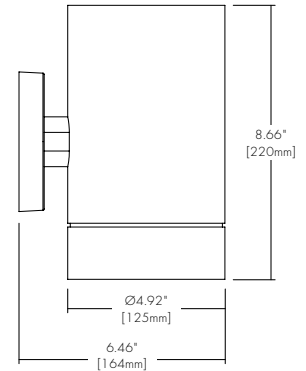

### Features

- Faceted and Smooth metal reflectors provide beam spreads between 10° to 80°.
- Nine drivers selections available to cover wide range of applications.
- Four output options available up to 2000 lumens.
- 5 year warranty.

### Finish Options

- White
- Mocha
- Black
- Charcoal
- Silver
- Cerulean
- Firebrick



### Technical Information

| OUTPUT OPTIONS   | 700 lm   | 1000lm   | 1500lm   | 2000lm   |
|--|----------|----------|----------|----------|
| <b>Fixture wattage</b>                                 | 6.1 W    | 9.1 W    | 14.0 W   | 19.8 W   |
| <b>Delivered Lumen at 3500K</b>                        | 656 lm   | 1035 lm  | 1539 lm  | 1917 lm  |
| <b>Efficacy</b>  | 108 lm/W | 114 lm/W | 110 lm/W | 97 lm/W  |
| <b>Center Beam Candlepower (10° Faceted Reflector)</b> | 7432 cd  | 11024 cd | 16289 cd | 22297 cd |

| CCT   | Multiplier | CRI | TM-30          |                |                |
|-------|------------|-----|----------------|----------------|----------------|
|       |            |     | R <sub>f</sub> | R <sub>g</sub> | R <sub>9</sub> |
| 2500K | 0.81       | 92  | 90             | 104            | 77             |
| 2700K | 0.92       | 92  | 91             | 102            | 61             |
| 3000K | 0.97       | 95  | 92             | 102            | 61             |
| 3500K | 1.00       | 95  | 93             | 101            | 72             |
| 4000K | 1.07       | 95  | 92             | 103            | 68             |
| 6500K | 1.05       | 96  | 91             | 100            | 89             |

Integral Driver Example: Fixture LET11-WM-07-25K-F10-NA-WH-WH-PHSD-NA  
 Remote Driver Example: Fixture LET11-WM-07-25K-F10-NA-WH-WH-010L-NA  
 HRM-LET11-WM-07-25K-010L-NA

### Ordering Code

#### Fixture

| MODEL         | TYPE          | OUTPUT   | CCT  | OPTIC   | ACCESSORY  | BODY FINISH  | BAFFLE FINISH  |
|---------------|---------------|--|--|---|--|--|--|
| LET11-Leto 11 | WM-Wall Mount | 07-700 lumens (6.1W) <sup>1</sup><br>10-1000 lumens (9.1W)<br>15-1500 lumens (14.0W)<br>20-2000 lumens (19.8W) | 25K-2500K<br>27K-2700K<br>30K-3000K<br>35K-3500K<br>40K-4000K<br>65K-6500K | F10-10 Degree, Faceted<br>F18-18 Degree, Faceted<br>F30-30 Degree, Faceted<br>F45-45 Degree, Faceted<br>F60-60 Degree, Faceted<br>S30-30 Degree, Smooth<br>S45-45 Degree, Smooth<br>S80-80 Degree, Smooth | NA-No Accessory<br>CL-Clear Lens<br>DL-Diffusing Lens<br>HC-Honeycomb Louver<br>SL-Solite Lens | <b>Standard</b><br>WH-White<br>BK-Black<br>SL-Silver<br><br><b>Premium<sup>2</sup></b><br>MA-Mocha<br>CC-Charcoal<br>CR-Cerulean<br>FB-Firebrick | <b>Standard</b><br>WH-White<br>BK-Black<br>SL-Silver<br><br><b>Premium<sup>2</sup></b><br>MA-Mocha<br>CC-Charcoal<br>CR-Cerulean<br>FB-Firebrick |

#### DRIVER<sup>3</sup>

#### DRIVER OPTIONS<sup>5</sup>

- PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only
- 010S - 0-10V, 1% Dimming, 120/277V
- 0103 - 0-10V, 1% Dimming, 347V Only
- 010L - EdoLED, 0-10V, Linear, 0.1% Dimming, 120/277V
- 010G - EdoLED, 0-10V, Log, 0.1% Dimming, 120/277V
- DALI - EdoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V
- DALI8 - EdoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V
- LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V
- DMX - EdoLED, DMX, 0.1% Dimming, 120V/277V

- NA - None
- EMG - Emergency Driver<sup>4</sup>

1 - 700 lumens is not available with LUTE driver.  
 2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request  
 3 - All drivers remote except PHSD/010S driver options  
 4 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.  
 5 - AAWNR/CSMB available upon request, contact Senso for details.

CONTACT FACTORY FOR MORE OPTIONS.

## Lens & Accessory Options

### OPTC-ACC-CL-94MM

#### Clear Lens

Also available with complete fixture, use ordering code.

**-CL**



Light Loss Factor: 100%\*

### OPTC-ACC-DL-94MM

#### Diffusing Lens

Also available with complete fixture, use ordering code.

**-DL**



Light Loss Factor: 87%\*

### OPTC-ACC-HC-94MM

#### Honeycomb Lens

Also available with complete fixture, use ordering code.

**-HC**



Light Loss Factor: 45%\*

### OPTC-ACC-SL-94MM

#### Solite Lens

Also available with complete fixture, use ordering code.

**-SL**



Light Loss Factor: 92%\*

\*Light Loss Factor calculated with 60° faceted reflector.

## Optics

### RFLC-FXX-94MM

#### Faceted Reflector

Also available with complete fixture, use ordering code.

**-F10/-F18/-F30/-F45/-F60**



### RFLC-SXX-94MM

#### Smooth Reflector

Also available with complete fixture, use ordering code.

**-S30/-S45/-S60**



| FXX | Optic       |
|-----|-------------|
| F10 | 10° Faceted |
| F18 | 18° Faceted |
| F30 | 30° Faceted |
| F45 | 45° Faceted |
| F60 | 60° Faceted |
| S30 | 30° Smooth  |
| S45 | 45° Smooth  |
| S60 | 60° Smooth  |


## Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

| REMOTE DRIVER       | MODEL                       | OUTPUT          | CCT             | DRIVER          | DRIVER OPTIONS  |
|---------------------|-----------------------------|-----------------|-----------------|-----------------|-----------------|
| HRM-Housing, Remote | LET11-WM-Leto 11 Wall Mount | Same as Fixture | Same as Fixture | Same as Fixture | Same as Fixture |


| Maximum mounting distance to luminaire using 18 AWG wire |      |      |      |            |      |      |
|--|------|------|------|------------|------|------|
| 010S   | PHSD | 010L | 010G | DALI DALI8 | DMX  | LUTE |
| 16'  | 16'  | 72'  | 72'  | 72'        | 149' | 15'  |

### HRM Single with Externally Mounted Driver

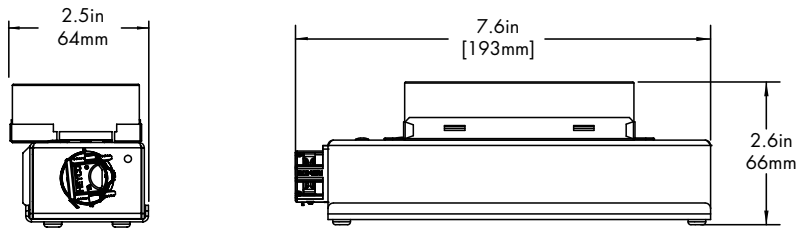


| Driver               |
|----------------------|
| 010L or 010G         |
| 010S                 |
| 010L or 010G or 010S |
| DALI or LUTE         |

### HRM Single

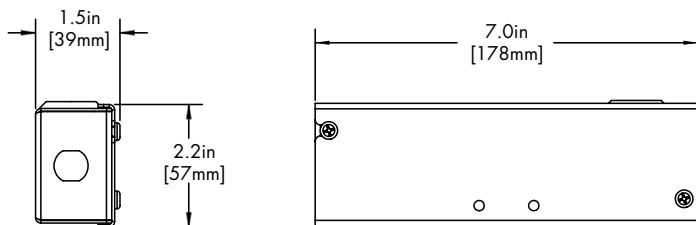

| Driver |
|--------|
| PHSD   |


### HRM Double

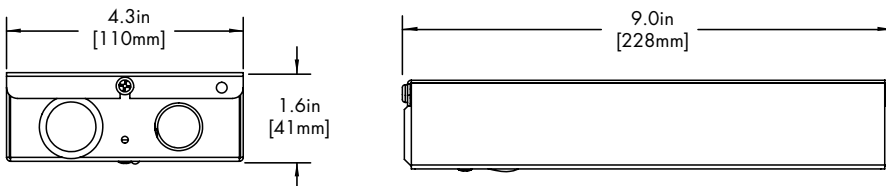

| Driver |
|--------|
| DALI8  |
| DMX    |

### EMG Emergency Driver

120 minute EMG operation time.

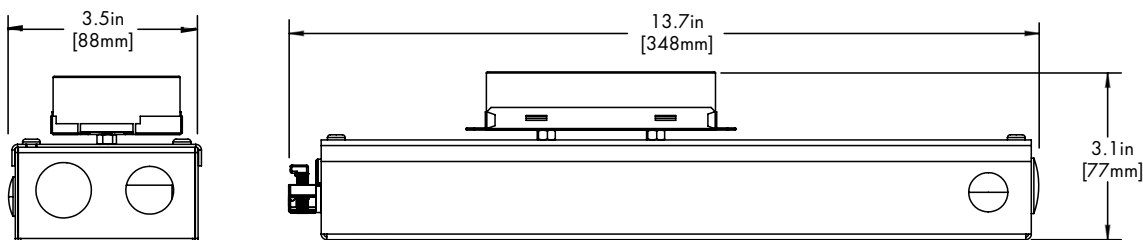

| Driver |
|--------|
| EMG    |

## Standard Finishes

---

**BK**  
Black



**WH**  
White



**SL**  
Silver



## Premium Finishes

---


**MA**  
Mocha




**CC**  
Charcoal



**CR**  
Cerulean






**FB**  
Firebrick



## Two Tone Baffle

---


Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.



## TM-30

### 2500K


COLOR VECTOR GRAPHIC

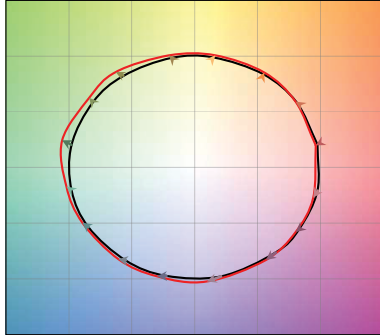

— Reference Source — Test Source

### 2700K


COLOR VECTOR GRAPHIC

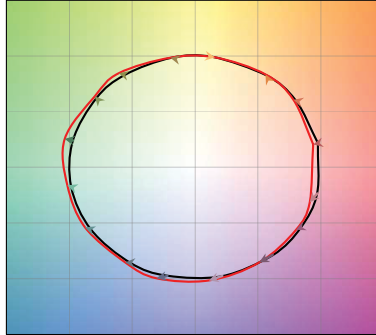

— Reference Source — Test Source

### 3000K


COLOR VECTOR GRAPHIC

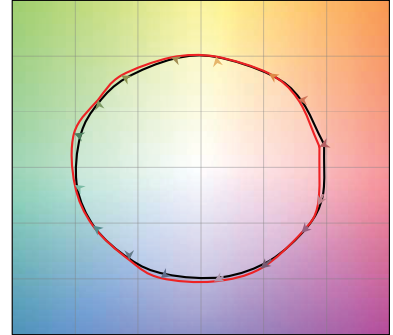

— Reference Source — Test Source

### 3500K


COLOR VECTOR GRAPHIC

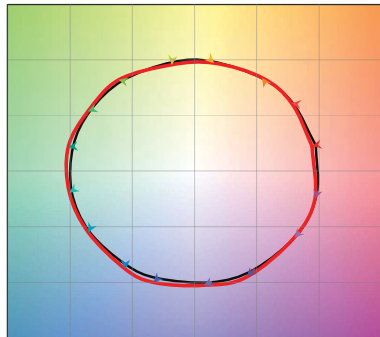

— Reference Source — Test Source

### 4000K


COLOR VECTOR GRAPHIC

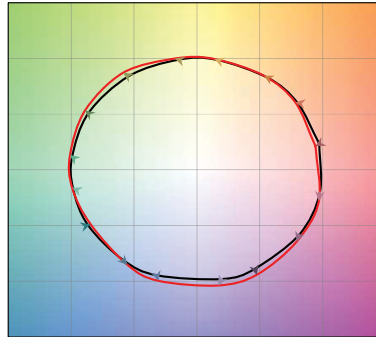

— Reference Source — Test Source

### 6500K



COLOR VECTOR GRAPHIC

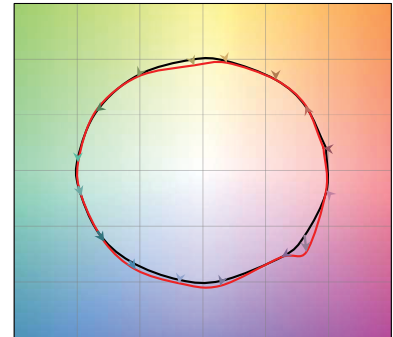



— Reference Source — Test Source

## Photometry



### 10° Faceted Reflector

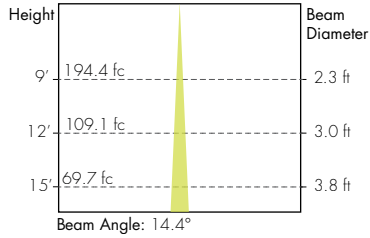



### 30° Smooth Reflector

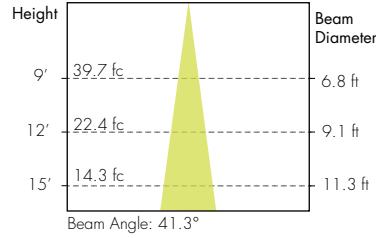



### 18° Faceted Reflector

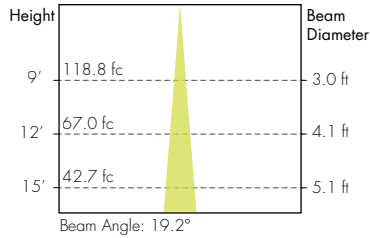



### 45° Smooth Reflector

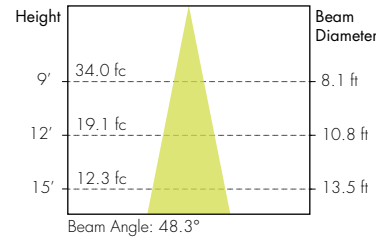



### 30° Faceted Reflector

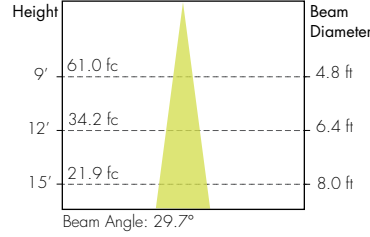

### 80° Smooth Reflector

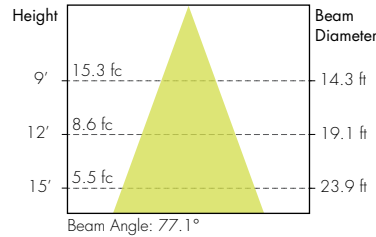

### 45° Faceted Reflector

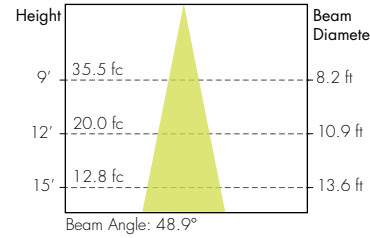

### 60° Faceted Reflector

