

# LETO 11.5

SUSPENDED ASYMMETRIC LED CYLINDER  
TUNABLE WHITE/WARM DIM




## Features

- Faceted and Smooth metal reflectors provide beam spreads between 10° to 80°.
- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 2000 lumens.
- Five year warranty.

## Finish Options

- White
- Mocha
- Black
- Charcoal
- Silver
- Cerulean
- Firebrick

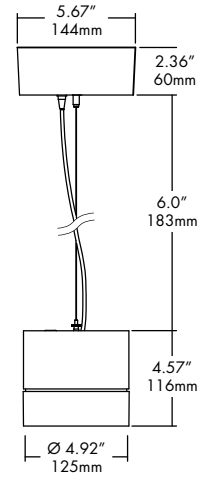

## Technical Information

TYPE	WD1830			TW2765
<b>OUTPUT OPTIONS</b>	<b>700 lm</b>	<b>1000 lm</b>	<b>1300 lm</b>	<b>1300 lm</b>
<b>Fixture wattage</b>	6.7 W	11.2 W	14.5 W	13.4 W
<b>Delivered Lumen at full on</b>	775 lm	859 lm	1095 lm	1145 lm
<b>Efficacy</b>	116 lm/W	77 lm/W	76 lm/W	85 lm/W
<b>Center Beam Candlepower (18° Faceted Reflector)</b>	5680 cd	1249 cd	1632 cd	7495 cd

CCT	CRI	TM-30		
		R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
1800K	94	90	93	61
3000K	94	89	97	72
2700K	91	90	96	59
6500K	93	87	97	73

## Ordering Code

Integral Driver Example: Fixture LET115-S-07-WD1830-ASM-DL-WH-WH-RD-WH-2AF-NA-PHSD-NA  
Remote Driver Example: Fixture LET115-S-07-WD1830-ASM-DL-WH-WH-RD-WH-2AF-NA-010L-NA  
HRM-LET115-S-07-WD1830-010L-NA

### Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET115 - Leto 11.5	S - Suspended	07 - 700 lumens <sup>1</sup> 10 - 1000 lumens 13 - 1300 lumens	WD1830 - Warm Dim, 1800K-3000K TW2765 - Tunable White, 2700K-6500K <sup>11</sup>	ASM - Asymmetric	DL - Diffusing Lens	Standard WH - White BK - Black SL - Silver Premium? MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	Standard WH - White BK - Black SL - Silver Premium? MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
RD - Round RTL - Round Trimless <sup>3,5</sup> SQ - Square	Standard WH - White BK - Black SL - Silver  Premium? MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	2AF - 2AC+Feed Cable SS2 - Solid Stem, 2ft SS3 - Solid Stem, 3ft SS6 - Solid Stem, 6ft HS2 - Hang Straight, 2ft <sup>5</sup> HS3 - Hang Straight, 3ft <sup>5</sup> HS6 - Hang Straight, 6ft <sup>5</sup> POA - 2 Powered Aircraft	Standard NA - None <sup>7</sup> CL - Clear <sup>1,2</sup> WH - White BK - Black SL - Silver <sup>9</sup>  Premium? MA - Mocha <sup>6</sup> CC - Charcoal <sup>6</sup> CR - Cerulean <sup>6</sup> FB - Firebrick <sup>6</sup>	PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only 0105 - 0-10V, 1% Dimming, 120/277V 0103 - 0-10V, 1% Dimming, 347V Only 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V <sup>4</sup> 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V <sup>4</sup> DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V <sup>3</sup> LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V <sup>3</sup>	NA - None EMG - Emergency Driver <sup>8,9</sup> CSMB - Casambi <sup>9,10</sup> AWNRR - Athena <sup>9,10</sup>

1 - 700 lumens is not available with LUTE driver.  
2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.  
3 - All drivers remote mounted when using RTL canopy, DALI8 driver, DMX driver, or EMG driver options.  
4 - Requires square canopy SQ for integral driver, otherwise remote mounted.  
5 - RTL canopy is not available with HS2/HS3/HS6 suspension.  
6 - These finishes are only available with SS Solid Stem or HS Hang Straight.  
7 - Must select NA None when POA option is selected.

8 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.  
9 - AWNR/CSMB only available with 0105 driver and RD/SQ canopy  
10 - AWNR/CSMB available upon request with RTL canopy.  
11 - TW2765 only available with 13 lumens and 010L/010G/DALI8/DMX. Always remote mounted. Cannot use with EMG.  
12 - Clear Suspension Finish only available with 2AF.  
CONTACT FACTORY FOR MORE OPTIONS.

# LETO 11.5

SUSPENDED ASYMMETRIC LED CYLINDER  
TUNABLE WHITE/WARM DIM

## Canopy

### RD

Round Canopy



Integral Drivers	Remote Drivers
010S	010L
0103	010G
PHSD	DALI
	DALI8
	LUTE
	DMX

### RTL


Round Trimless Canopy



Integral Drivers	Remote Drivers
N/A	010S
	0103
	PHSD
	010L
	010G
	DALI
	DALI8
	LUTE
	DMX

### SQ

Square Canopy



Integral Drivers	Remote Drivers
010S	DMX
0103	DALI8
PHSD	
010L	
010G	
DALI	
DALI8	
LUTE	

Please see next page for Remote Driver Housing details.

## Suspension

### 2AF

2 Aircraft + Feed Cable

### SSX (2', 3', 6' max)

Solid Stem

### HSX (2', 3', 6' max)

Hang Straight Solid Stem

### POA

2 Powered Aircraft



Maximum Slope: 30°

## Lens

### DL

Diffusing Lens



Light Loss Factor: 87%\*

\*Light Loss Factor calculated with 60° faceted reflector.


## Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET115-S-letto 11.5 Suspended	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

## HRM Single with Externally Mounted Driver

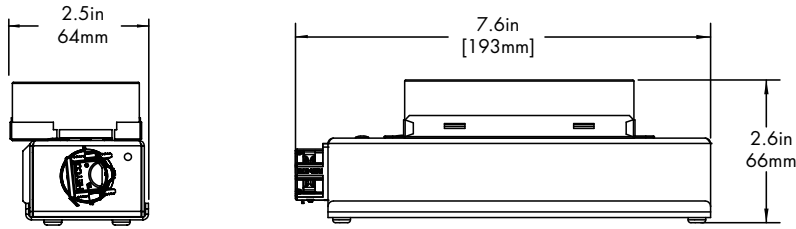


Canopy	+	Driver
RTL or RD	+	010L or 010G
RTL or RD	+	010S
RTL	+	010L or 010G or 010S
RTL or RD	+	DALI or LUTE

## HRM Single

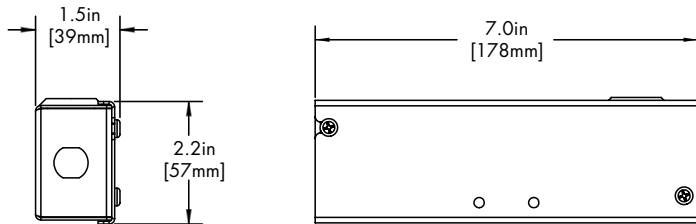

Canopy	+	Driver
RTL	+	PHSD


## HRM Double

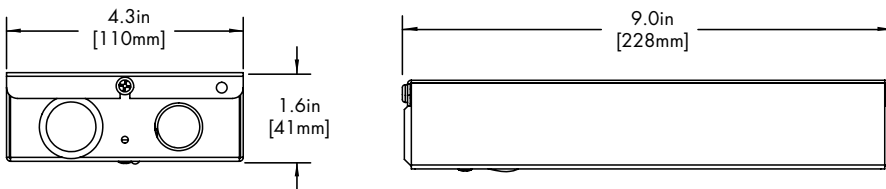

Driver
DALI8
DMX

## EMG Emergency Driver

120 minute EMG operation time.

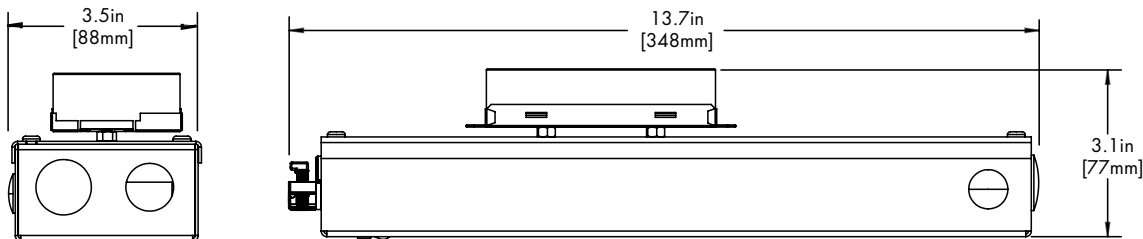

Driver
EMG

# LETO 11.5

SUSPENDED ASYMMETRIC LED CYLINDER  
TUNABLE WHITE/WARM DIM

## Standard Colors

**BK**  
Black



**WH**  
White




**SL**  
Silver



## Premium Colors


**MA**  
Mocha




**CC**  
Charcoal



**CR**  
Cerulean





**FB**  
Firebrick



## Two Tone Finishes

Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.




# LETO 11.5

SUSPENDED ASYMMETRIC LED CYLINDER  
TUNABLE WHITE/WARM DIM

## TM-30

**Warm Dim 1800K**


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

**Warm Dim 3000K**


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

**Tunable White 2700K**


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

**Tunable White 6500K**

COLOR VECTOR GRAPHIC



— Reference Source — Test Source

## Photometry

### 18° Faceted Reflector

