ARTEMIS 3 W Wet

WET RATED RECESSED WALL WASHING LED DOWNLIGHT









Artemis 3 W Wet - Wet Rated Recessed Wall Washing LED Downlight. Artemis 3 W features a Senso-designed reflector and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

Fixt	ture	AR3W	WR							
		1	2	3	4	5	6	7	8	9
Dri	iver		AR3W	WR						
		4	_	_	4	5	6	7		

Product Specifications

SAMPLE: Fixture AR3W - WR - A90 - - - 25 - 10 - DL - 02 - 08 | Driver 915 - AR3W - WR - STD - 120 - A90 - 07 - 08

1 - Model	2 - Trim	3	- LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory	8 - Trim Color
AR3W · Artemis Wall Wa		et Rated .	190 • 93+ CRI Accuracy	618 · 18°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	10 · 1000 (9.1W) 15 · 1500 (14W) 20 · 2000 (19.8W) 30 · 3000 (31.8W)		01 · White 02 · Black 08 · Silver XX · Custom
9 - Baffle Color	r 1 - Hous	ing Style	2 - Mode	l 3 - Trim	4 - Driver	Dim l	Level	Dim Level
01 · White 02 · Black 08 · Silver XX · Custom		w Construction Housing* ^{1/6}	Same as Fixture	Same as Fixture	DIM ⋅ Pha	10 Volt Protocol 1% se* ^{2/3} 10 DLED 0 - 10 Volt 0.	LUT2W · 2 Wire for DMX · Senso · 4 EMG · Emergence	phase*3 1% by Driver*4/5
5 - Voltage 120 · 120V 277 · 277V	6 - LED Same as Fixtu	7 - Lu ire Same	men as Fixture	*1 Cannot exceed 1500im *2 Not available in 3000im *3 Not available in 277V		Proje Quanti	ty:	
347 · 347V				*4 Remote mounted *5 Specified separately *6 JA8 Compliant		Typ Note	ee:es:	

ARTEMIS 3 W Wet

WET RATED RECESSED WALL WASHING LED DOWNLIGHT



LED Module Performance

Output: up to 3000lm

High Efficacy: up to 101 lumen/Watt

Color Options (CCT): 2500K, 2700K, 3000K, 3500K, 4000K or 6500K

Color Consistency: Range within a 3-MacAdam Ellipse Color rendering (CRI): 93+ CRI & R9 Value of 50+

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option

Ripple: Industry leading Low ripple

Efficiency: Power Factor > 0.9

Efficiency over 85% Class 2 output for safety

Installation: Small Footprint allows retrofit installations


Lumen Option	1000lm	1500lm	2000lm	3000lm
Fixture Wattage	9.1W	14W	19.8W	31.8W
Delivered Lumen	913lm	1421lm	2001lm	2910lm

Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect
- 18° tilt angle

Construction / Finish

- Satin powder coated finish
- · Custom finishes are available
- Cast Aluminum Trim
- Made in Canada

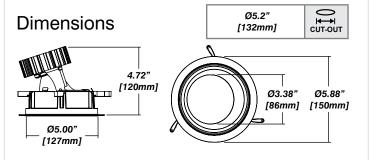

ARTEMIS 3 W Wet





Housing Options

New Construction - 915 Dimension Included Plaster Frame Galvanized steel construction with cut-out Ø5.2" [132mm] Bar hanger Length: from 14-3/16" to 26" Outlet Box Included **Outlet Box** 8.6" [218mm] 12.7 [323mm] 3.6 [92mm]

14.5" [369mm]

