


ARTEMIS 5 A

RECESSED ADJUSTABLE LED DOWNLIGHT

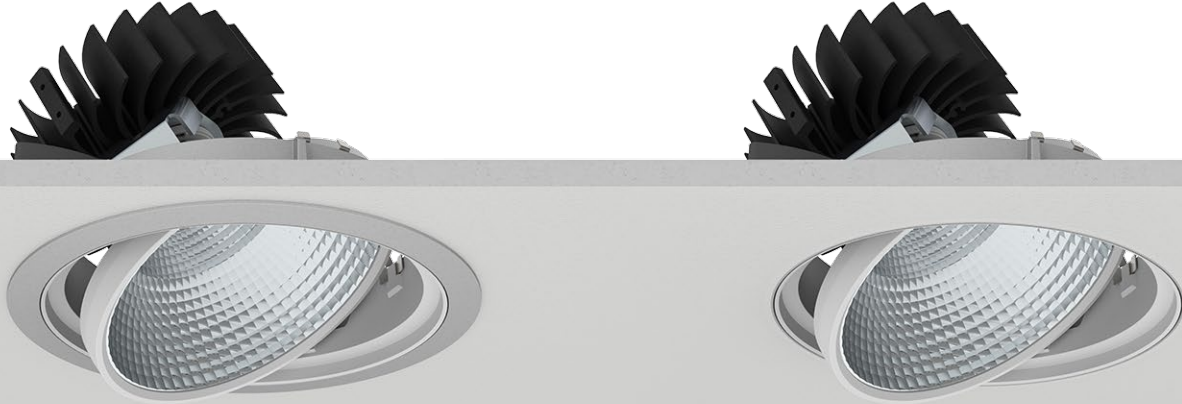

Artemis - Recessed Adjustable LED Downlight. Artemis 5 A features SENSO-designed reflectors and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

Fixture	AR5A								
	1	2	3	4	5	6	7	8	9
Driver		AR5A	--			--	--	--	
	1	2	3	4	5	6	7	8	

Product Specifications

SAMPLE: Fixture **AR5A - TL - A90 - 610 - 25 - 15 - DL - 02 - 08** | Driver **910 - AR5A - TL - STD - 120 - A90 - 07 - 08**

1 - Model	2 - Trim	3 - LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory	8 - Trim Color
AR5A · Artemis 5 Adjustable	FL · Flanged TL · Trimless	A90 · Accuracy	610 · 10° 618 · 18° 630 · 30° 645 · 45° 660 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	15 · 1500 (14W) 20 · 2000 (19W) 30 · 3000 (29.8W) 40 · 4000 (45.6W) 50 · 5000 (60.2W) 60 · 6000 (68W)	00 · No Accessory DL · Diffusing Lens HO · Honeycomb	01 · White 02 · Black 08 · Silver XX · Custom

9 - Baffle Color	1 - Housing Style	2 - Model	3 - Trim	4 - Driver	Dim Level	Dim Level	
01 · White 02 · Black 08 · Silver XX · Custom	910 · Remote 915 · New Construction	Same as Fixture	Same as Fixture	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ^{*1/2} ELDOLC · EldoLED 0 - 10 Volt ^{*3} DALI · Dali Protocol ^{*3}	N/A 1% 10% 0.1% 0.1%	LUTES · Hilume Ecodigital ^{*3} LUT2W · 2 Wire for phase ^{*2} LUT5S · 5 Series Eco System ^{*4} DMX · SENSO ^{*3} EMG · Emergency Driver ^{*3/5/6}	1% 1% 5%

5 - Voltage	6 - LED	7 - Lumen	8 - Baffle Color ^{*7}
120 · 120V 277 · 277V 347 · 347V	Same as Fixture	Same as Fixture	Same as Fixture

*1 Only available in 1500lm and 2000lm
*2 120V only
*3 Only available up to 4000lm
*4 Only available up to 3000lm
*5 Requires remote housing
*6 Specified separately
*7 Only needed for Trimless

Project : _____
Quantity : _____
Type : _____
Notes : _____

ARTEMIS 5 A

RECESSED ADJUSTABLE LED DOWNLIGHT



Light Engine

- Output:** up to 6000lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

Driver


- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations

Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect
- 0° to 30° adjustable tilt angle

Construction / Finish



- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Made in Canada

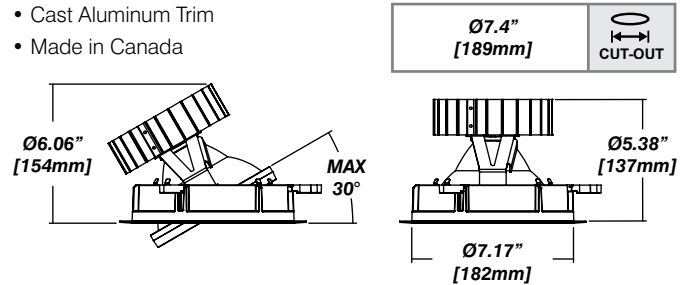


Accessories

Diffusing Lens


Honeycomb Mesh

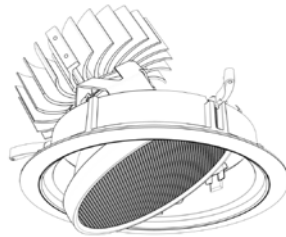

Flanged

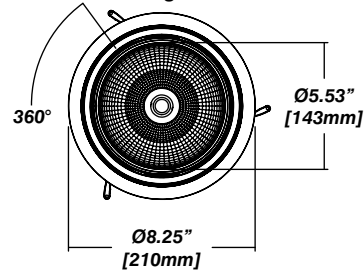


Trimless



Reflector

Faceted Reflector

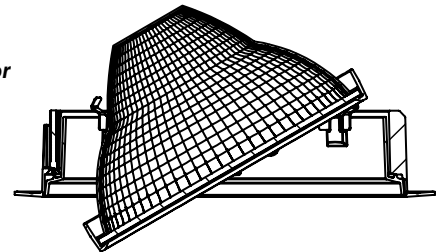



ARTEMIS 5 A

RECESSED ADJUSTABLE LED DOWNLIGHT





Housing Options

Standard Senso Housing - 910



Dimension

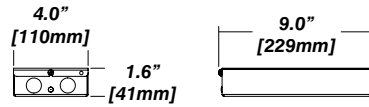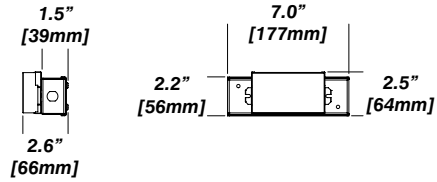


Included



Unless specified otherwise, this is provided as standard

- Driver with enclosure** • Galvanized steel enclosure
- Installation** • Laying on top of ceiling
Remote from fixture
Hanger bar and mount included

New Construction - 915

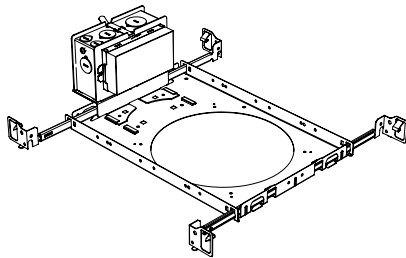

Dimension

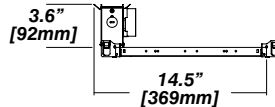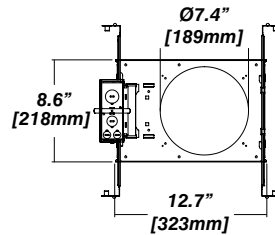

Included

- Plaster Frame** • Galvanized steel construction with cut-out
- Bar hanger** • Length: from 14-3/16" to 26"
- Outlet Box** • Outlet Box Included

