

Artemis 5 W - Recessed Wall Washing LED Downlight. Artemis 5 W features a SENSO-designed reflector and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

Fixture	AR5W								
	1	2	3	4	5	6	7	8	9
Driver		AR5W							
	1	2	3	4	5	6	7	8	

Product Specifications

SAMPLE: Fixture AR5W - TL - A90 - 618 - 25 - 10 - DL - 02 - 08 | Driver 910 - AR5W - TL - STD - 120 - A90 - 07 - 08

1 - Model		2 - Trim	3 - LEI)	4 - Optic	5 - CCT	6 - Lumen	7 -	Accessory	8 - Trim	Color
AR5W · Artemis Wall Wa		FL · Flanged TL · Trimless	A90 · 9	93+ CRI Accuracy	618 · 18°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	15 · 1500 (13.7W) 20 · 2000 (19W) 30 · 3000 (26.8W) 40 · 4000 (37.2W) 50 · 5000 (50.2W) 60 · 6000 (66.6W)		· Diffusing Lens	01 · Whit 02 · Blac 08 · Silve XX · Cus	ck er
9 - Baffle Color	•	1 - Housing St	tyle	2 - Model	3 - Trim	4 - Driver		im Level		[Dim Level
01 · White 02 · Black 08 · Silver XX · Custom		910 · Remote 915 · New Cons	struction	Same as Fixture	Same as Fixture	LCS · DIM · ELDOLC ·	Non Dimming 0 - 10 Volt Protocol Phase**//2 EldoLED 0 - 10 Volt*3 Dali Protocol*3	N/A 1% 10% 0.1% 0.1%	LUTES · Hilume LUT2W · 2 Wire DMX · SENSO EMG · Emerg CSMB · Casar	for phase*2)*3 ency Driver*3/5/6	
5 - Voltage	6 -	LED	7 - Lum	nen	8 - Baffle Co	olor* ⁷					
120 - 120V 277 - 277V 347 - 347V	Same as Fixture Same as		as Fixture	Same as Fixture		Only available in 1500im and 2000i 120V only Only available up to 4000im Only available up to 3000im Requires remote housing	Quantit Typ	y: e:			
							Specified separately Only needed for Trimless	Note	S:		

ARTEMIS 5 W

RECESSED WALL WASHING LED DOWNLIGHT



LED Module Performance

Output: up to 6000lm

High Efficacy: up to 117 lumen/Watt

Color Options (CCT): 2500K, 2700K, 3000K, 3500K, 4000K or 6500K

Color Consistency: Range within a 3-MacAdam Ellipse

Color rendering (CRI): 93+ CRI & 50+ R9 Value

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option

Ripple: Industry leading Low ripple


Efficiency: Power Factor > 0.9

Efficiency over 85%

Class 2 output for safety

Installation: Small Footprint allows retrofit installations

Lumen Option	1500lm	2000lm	3000lm	4000lm	5000lm	6000lm
Fixture Wattage	13.7W	19W	26.8W	37.2W	50.2W	66.6W
Delivered Lumen	1612lm	2178lm	3080lm	4081lm	5097lm	6097lm

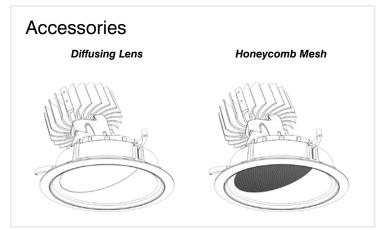


Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect
- 18° tilt angle


Construction / Finish

- Satin powder coated finish
- · Custom finishes are available
- Cast Aluminum Trim
- Rated for damp locations
- · Made in Canada


Dimensions



Ø7.4" [189mm]





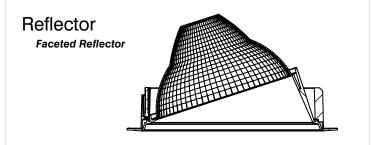








ARTEMIS 5 W





Housing Options

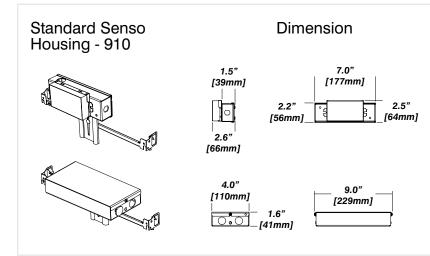

Included

Unless specified otherwise, this is provided as standard

Driver with enclosure •


Galvanized steel enclosure

Remote from fixture


Installation • Laying on top of ceiling


Hanger bar and mount included

New Construction - 915



Dimension





Included

Plaster Frame Galvanized steel construction with cut-out

Bar hanger • Length: from 14-3/16" to 26"

Outlet Box • Outlet Box Included