

# ARTEMIS 5 W

RECESSED WALL WASHING LED DOWNLIGHT



**Artemis 5 W - Recessed Wall Washing LED Downlight.** Artemis 5 W features a SENSO-designed reflector and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

## Ordering Code

Fixture	<b>AR5W</b>								
	1	2	3	4	5	6	7	8	9
Driver		<b>AR5W</b>	--			--	--	--	
	1	2	3	4	5	6	7	8	

## Product Specifications

SAMPLE: Fixture **AR5W - TL - A90 - 618 - 25 - 10 - DL - 02 - 08** | Driver **910 - AR5W - TL - STD - 120 - A90 - 07 - 08**

1 - Model	2 - Trim	3 - LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory	8 - Trim Color
<b>AR5W</b> · Artemis 5 Wall Wash	<b>FL</b> · Flanged <b>TL</b> · Trimless	<b>A90</b> · Accuracy	<b>618</b> · 18°	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<b>15</b> · 1500 (14W) <b>20</b> · 2000 (19W) <b>30</b> · 3000 (29.8W) <b>40</b> · 4000 (45.6W) <b>50</b> · 5000 (60.2W) <b>60</b> · 6000 (68W)	<b>DL</b> · Diffusing Lens	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom

9 - Baffle Color	1 - Housing Style	2 - Model	3 - Trim	4 - Driver	Dim Level	Dim Level	
<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom	<b>910</b> · Remote <b>915</b> · New Construction	Same as Fixture	Same as Fixture	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase <sup>*1/2</sup> <b>ELDOLC</b> · EldoLED 0 - 10 Volt <sup>*3</sup> <b>DALI</b> · Dali Protocol <sup>*3</sup>	N/A 1% 10% 0.1% 0.1%	<b>LUTES</b> · Hilume Ecodigital <sup>*3</sup> <b>LUT2W</b> · 2 Wire for phase <sup>*2</sup> <b>LUT5S</b> · 5 Series Eco System <sup>*4</sup> <b>DMX</b> · SENSO <sup>*3</sup> <b>EMG</b> · Emergency Driver <sup>*3/5/6</sup>	1% 1% 5%

5 - Voltage	6 - LED	7 - Lumen	8 - Baffle Color <sup>*7</sup>
<b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V	Same as Fixture	Same as Fixture	Same as Fixture

\*1 Only available in 1500lm and 2000lm  
\*2 120V only  
\*3 Only available up to 4000lm  
\*4 Only available up to 3000lm  
\*5 Requires remote housing  
\*6 Specified separately  
\*7 Only needed for Trimless

Project : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Type : \_\_\_\_\_  
Notes : \_\_\_\_\_



# ARTEMIS 5 W

RECESSED WALL WASHING LED DOWNLIGHT

## Light Engine

- Output:** up to 6000lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

## Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations





## Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect
- 18° tilt angle

## Construction / Finish


- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Rated for damp locations
- Made in Canada

## Dimensions

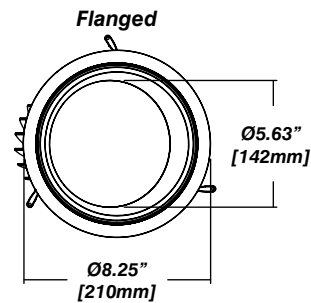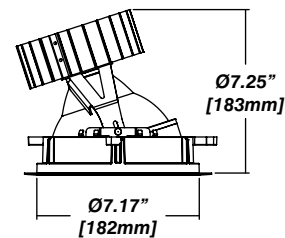


## Accessories

*Diffusing Lens*

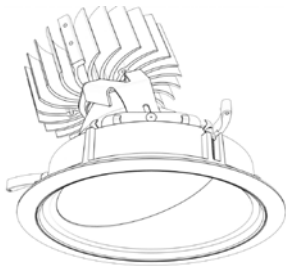


*Honeycomb Mesh*

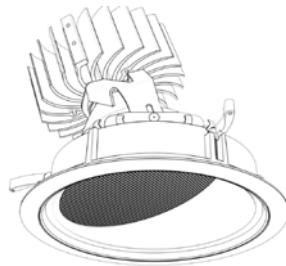

## Reflector

*Faceted Reflector*


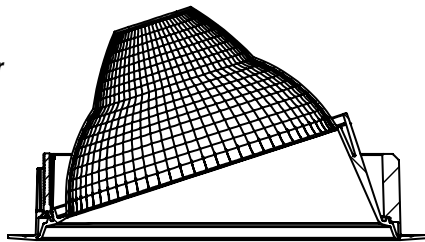


# ARTEMIS 5 W



RECESSED WALL WASHING LED DOWNLIGHT

## Housing Options

### Standard Senso Housing - 910



### Dimension

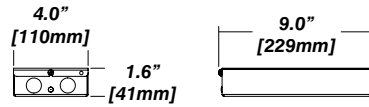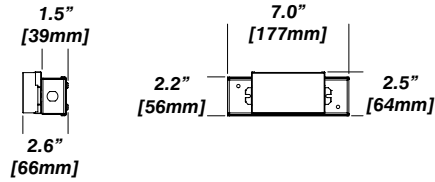


### Included



Unless specified otherwise, this is provided as standard

- Driver with enclosure** • Galvanized steel enclosure
- Installation** • Laying on top of ceiling  
Remote from fixture  
Hanger bar and mount included

### New Construction - 915

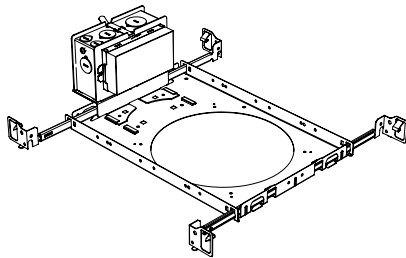

### Dimension

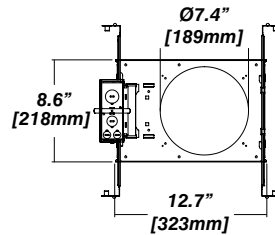

### Included

- Plaster Frame** • Galvanized steel construction with cut-out
- Bar hanger** • Length: from 14-3/16" to 26"
- Outlet Box** • Outlet Box Included