

LETO 1



Leto 1 Single - Recessed Adjustable downlight. The LETO 1 Single is a square recessed LED fixture. Designed to be architecturally pleasing, it is fully adjustable to 30°. It can be used as a general light application, or to highlight specific design areas, or can do both using the LETO 1 double and triple option.

Ordering Code

Fixture	670					
	1	2	3	4	5	6
Driver		670			--	--
	1	2	3	4	5	6

Product Specifications

SAMPLE: Fixture **670 - 90 - 618 - 27 - 07 - 01** | Driver **910 - 670 - STD - 120 - 90 - 07**

1 - Model	2 - LED	3 - Reflector	4 - CCT	5 - Lumen	6 - Finish	1 - Housing Style
670 · Leto 1	<i>Performance</i> 90 · Designer <i>Specialized</i> 83V · Vibrancy* ² 98 · Artist 98+ 98V · Vibrancy/Artist* ² 98B · Beauty* ¹	618 · 18° 630 · 30° 645 · 45° 660 · 60°	27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K	07 · 700 10 · 1000 13 · 1300 20 · 2000 30 · 3000* ³	01 · White 02 · Black 08 · Silver XX · Custom	910 · Remote 915 · New Construction 920 · IC Housing* ⁴
2 - Model	3 - Driver	Dim Level	Dim Level	4 - Line Voltage	5 - LED	6 - Lumen
670 · Leto 1	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase* ⁵ ELDOLC · EldoLED 0 - 10 Volt* ⁶ DALI · Dali Protocol* ⁶	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital* ⁶ LUT2W · 2 Wire for phase* ⁶ LUT5S · 5 Series Eco System* ⁶ DMX · SENSO* ⁶ EMG · Emergency Driver* ^{6/7}	1% 1% 5%	120 · 120V 277 · 277V 347 · 347V* ⁸	Same as Fixture Same as Fixture

*1 Only available in 2700K

*2 Only available in 3000K

*3 Not available with Beauty Module

*4 1300lm max

*5 120V only

*6 Requires remote housing

*7 Specified separately

*8 Not available with ELDO, Lutron or DMX

Project : _____

Quantity : _____

Type : _____

Notes : _____

Performance Module

Output: Up to 125 lumen/Watt
Efficacy: Color consistency within 1x2 MacAdam Ellipses
CCT: 2700K - 4000K
Color Rendering: 90+ CRI
Min. R Values: R^g - 55 R^f - 88 R^a - 101

Designer - The Designer module is custom formulated to provide outstanding color rendering while retaining high efficacy.



Driver and Consumption

Dimming: 1% dimming standard with 0.1% option
Ripple: Industry leading Low ripple
Efficiency: Power Factor >0.9
 Efficiency over 85%
 Class 2 output for safety
Installation: Small Footprint allows retrofit installations

90 CRI Designer	Delivered Lumen	700lm	1000lm	1300lm	2000lm	3000lm
	Fixture Wattage	7.7W	11.0W	14.5W	20.5W	30.1W


Specialized Modules

Artist - Artist module is virtually from halogen light, and delivers high quality, natural light that is efficient and long lasting.



CCT: 2700 - 4000
CRI: 98+
Min. R Values
 R^g: 95
 R^f: 96
 R^a: 103

Vibrancy - Vibrancy Series enables us to see colors, hues and tones, that are real, but simply aren't visible under halogen light.

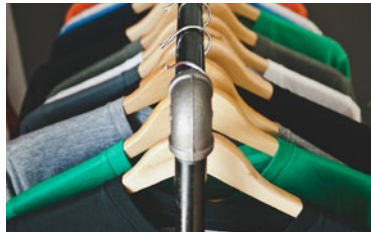

CCT: 3000
CRI: 83+, 98+
Min. R Values
 R^g: 28
 R^f: 73
 R^a: 105

Beauty - Beauty Series makes it possible to precisely tune the spectrum to deliver extraordinary clarity and fidelity for settings where people are the focus.




CCT: 2700
CRI: 95
Min. R Values
 R^g: 95
 R^f: 91
 R^a: 107


Reflector

Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency



Dimensions

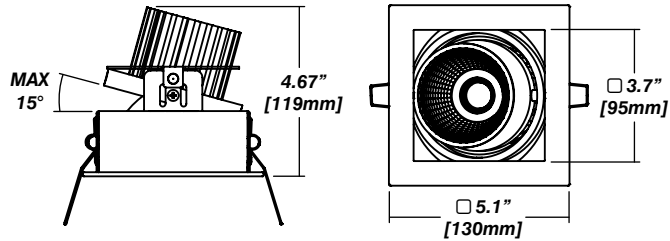

Installation

- For new and retrofit installations
- Holds in place with two spring clips
- Fully 30° angle adjustable spot, 360° rotation
- Simple connection between fixture and driver via quick connect
- Available wet rated in single version.



Construction / Finish

- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Rated for damp location
- Made in Canada

Housing Options

Standard Senso Housing - 910

Dimension

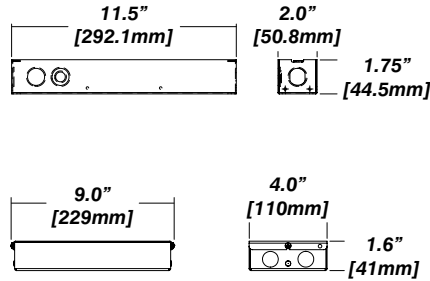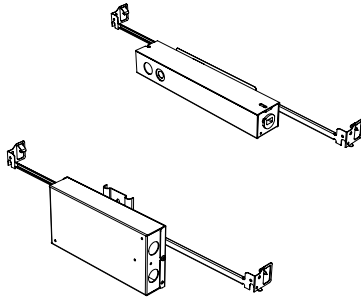

Included

Unless specified otherwise, this is provided as standard



- Bar hanger** • Length: from 14-3/16" to 26"
- Driver with enclosure** • Galvanized steel enclosure
- Security wire** • Flexible aircraft cable, 12" long
- Easy to clip snap body included

* driver can be installed either:

(A) laying on top of ceiling. (B) mounted to the bar hanger and fixed to the ceiling. (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture

New Construction - 915

Dimension

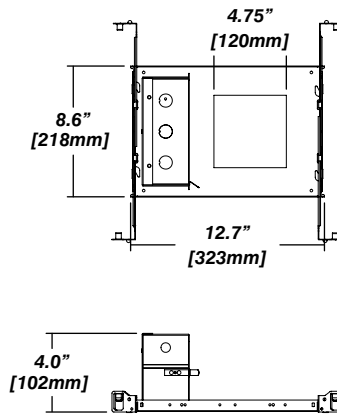
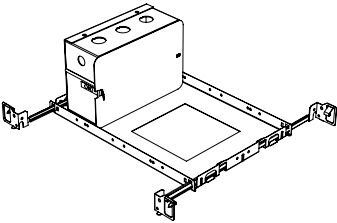


Included

- Plaster Frame** • Galvanized steel construction with cut-out to
- Bar hanger** • Length: from 14-3/16" to 26"
- Security wire** • Flexible aircraft cable, 12" long
- Easy to clip snap body included

IC Housing - 920

Dimension



Included

- IC Housing** • Galvanized steel construction
- Airtight
- Includes gasketed junction box
- Plaster Frame** • Galvanized steel construction
- Bar hanger** • Length: from 14-3/16" to 26"

Note: Lumen output cannot exceed 1300lm