


LETO 1

TRIPLE

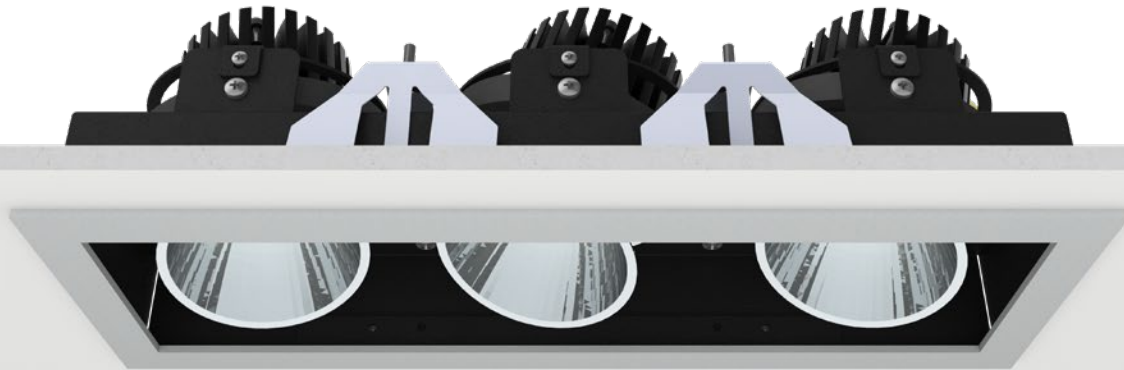

Leto 1 Triple - Recessed Adjustable downlight. The LETO 1 Triple is a 3 light version of the LETO 1 Single recessed LED fixture. Designed to be architecturally pleasing, it is fully adjustable up to 30°. It can be used for general light application, or to highlight specific design areas while remaining consistent with the LETO 1 Single and Double.

Ordering Code

Fixture	672					
	1	2	3	4	5	6
Driver		672			--	--
	1	2	3	4	5	6

Product Specifications

SAMPLE: Fixture **672 - 90 - 610 - 27 - 07 - 01** | Driver **910 - 672 - STD - 120 - 90 - 07**

1 - Model	2 - LED	3 - Reflector	4 - CCT	5 - Lumen	6 - Finish	1 - Housing Style
672 · Leto 1 Triple	90 · Designer 83V · Vibrancy* ² 98 · Artist 98+ 98V · Vibrancy/Artist* ² 98B · Beauty* ⁷	618 · 18° 630 · 30° 645 · 45° 660 · 60°	27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K	07 · 700 (4.5W) 10 · 1000 (6.6W) 13 · 1300 (9.5W) 20 · 2000 (15.2W) 30 · 3000* ³ (25.7W)	01 · White 02 · Black 08 · Silver XX · Custom	910 · Remote 915 · New Construction
2 - Model	3 - Driver	Dim Level	Dim Level	4 - Line Voltage	5 - LED	6 - Lumen
672 · Leto 1 Triple	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase* ⁴ ELDOLC · EldoLED 0 - 10 Volt* ⁵ DALI · Dali Protocol* ⁵	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital* ⁵ LUT2W · 2 Wire for phase* ^{4/5} LUT5S · 5 Series Eco System* ⁵ DMX · SENSO* ⁵ EMG · Emergency Driver* ^{5/6}	1% 1% 5%	120 · 120V 277 · 277V 347 · 347V* ⁷	Same as Fixture Same as Fixture

*1 Only available in 2700K
*2 Only available in 3000K
*3 Not available with Beauty Module
*4 120V only

*5 Requires remote housing
*6 Specified separately
*7 Not available with ELDO, Lutron or DMX

Project : _____
Quantity : _____
Type : _____
Notes : _____

Xicato XTM Module

- Up to 125 lumens per Watt at operating conditions
- Very tight color consistency, within 1 x 2 MacAdam Ellipses
- Available in 19mm and 9mm LES
- 90 and 98+ CRI versions

98+ (Artist)


Xicato Artist Series is virtually indistinguishable from halogen light, and delivers high quality, natural light that is efficient and long lasting.



CCT: 2700 - 4000
CRI: 98+

Vibrancy


Xicato Vibrant Series enables us to see colors, hues and tones, that are real, but simply aren't visible under halogen light.



CCT: 3000
CRI: 83+, 98+

Designer

Xicato Designer Series is custom formulated to provide outstanding color rendering while retaining high efficacy.



CCT: 2700 - 4000
CRI: 90

Beauty

Xicato Beauty Series makes it possible to precisely tune the spectrum to deliver extraordinary clarity and fidelity for settings where people are the focus.




CCT: 2700
CRI: 95

Reflector

Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency




Installation

- For new and retrofit installations
- Holds in place with four spring clips
- Fully 30° angle adjustable spot, 360° rotation
- Simple connection between fixture and driver via quick connect
- Available for wet rated in single version.

Construction / Finish


- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Made in Canada

Dimensions

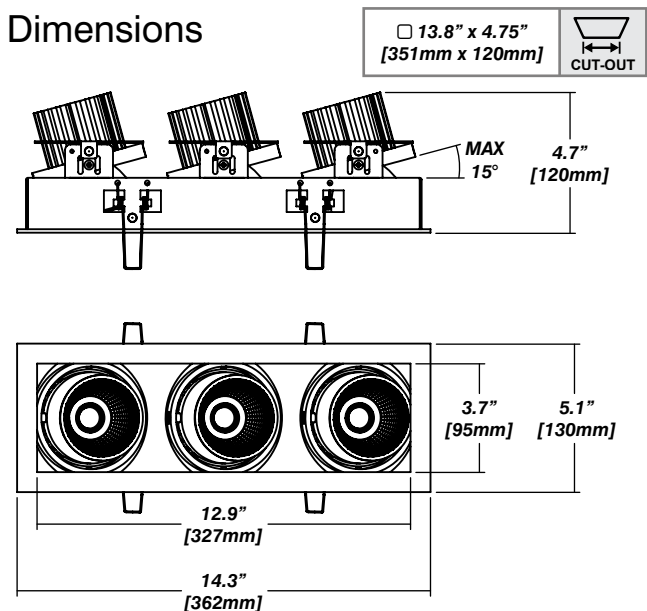


Housing Options

Standard Senso Housing - 910

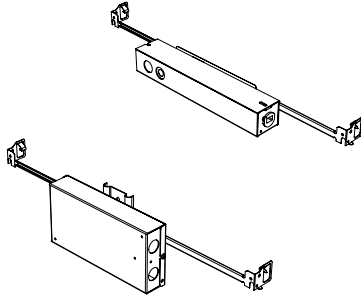

Dimension

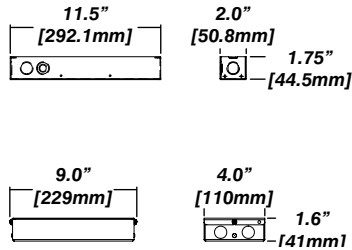

Included


Unless specified otherwise, this is provided as standard

- Bar hanger** • Length: from 14-3/16" to 26"
- Driver with enclosure** • Galvanized steel enclosure
- Security wire** • Flexible aircraft cable, 12" long
- Easy to clip snap body included


* driver can be installed either:

(A) laying on top of ceiling. (B) mounted to the bar hanger and fixed to the ceiling. (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture. (D) Fixture may require multiple drivers depending on specification.

New Construction - 915

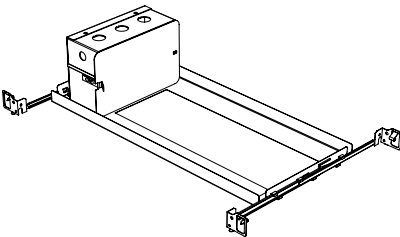

Dimension

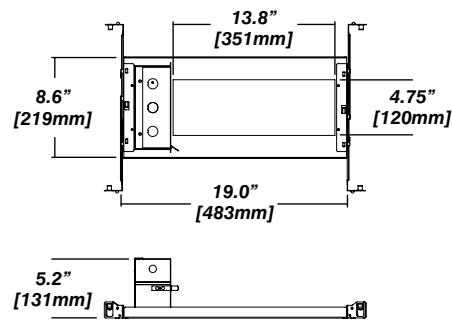

Includes

- Plaster Frame** • Galvanized steel construction
- Bar hanger** • Length: from 14-3/16" to 26"
- Outlet Box** • 7/8" knock out
- Divider inside
- Cover included
- Thermal protector** • Designed for protection of fixtures in non-IC setup
- Causes fixture light to blink in fault condition
- Automatic resetting
- Security wire** • Flexible aircraft cable, 12" long
- Easy to clip snap body included