

LETO 11 LB HP

LOW BAY PENDANT LED DOWNLIGHT



Leto 11 LB HP - Low Bay Pendant LED Downlight. LETO 11 LB HP is the solution for any low bay lighting application needs. Its ability to evenly light floors and working planes makes it ideal for office spaces, boardrooms and studios.

Ordering Code

Fixture	798							
	1	2	3	4	5	6	7	8
Driver							--	--
	1	2	3	4	5	6	7	8

Product Specifications

SAMPLE: Fixture **798 - A90 - 618 - 27 - 40 - 601 - 01 - 01** | Driver **951 - 01 - 00 - 08 - LCS - 120 - A90 - 40**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Accessory
798 · Leto 11 LB HP	A90 · Accuracy	618 · 18° 630 · 30° 645 · 45° 660 · 60°	27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K	40 · 4000 (34.2W) 50 · 5000 (41.8W)	600 · Clear Reflector 601 · Frosted Reflector

7 - Body Color	8 - Baffle Color	1 - Canopy Style	2 - Canopy Color	3 - Suspension (6' incl.)
<i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	<i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	952 · Square	<i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	01 · 1 Aircraft + Feed Cable Contact <i>SENSO</i> for custom length

4 - Feed Cable	5 - Driver	Dim Level	Dim Level	6 - Voltage	7 - LED	8 - Lumen
01 · White 02 · Black 03 · Clear XX · Custom	STD · Non Dimming LCS · 0 - 10 Volt Protocol ELDOLC · EldoLED 0 - 10 Volt DALI · Dali Protocol LUTES · Hilume Ecodigital	N/A 1% 0.1% 0.1% 1%	LUT2W · 2 Wire for phase ^{*3} LUT5S · 5 Series Eco System DMX · SENSO ^{*4} EMG · Emergency Driver ^{*4/5} CSMB · Casambi Wireless Control ^{*4/5}	1% 5% 	120 · 120V 277 · 277V 347 · 347V ^{*6}	Same as Fixture Same as Fixture

*1 only available in 4000lm

*2 only available in 3000K

*3 120V only

*4 remote mount

*5 specified separately

*6 not available with ELDO, Lutron or DMX

LETO 11 LB HP

LOW BAY PENDANT LED DOWNLIGHT



Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

Output: Up to 150 lumen/Watt

Efficacy: Color consistency within a 3-MacAdam Ellipse

CCT: 2500K - 6500K

Color Rendering: 90+ CRI

Min. R Values: R⁹ - 60 R^f - 90 R^a - 100

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option
Casambi wireless control available


Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

Installation: Remote mounted

Lumen Option	4000lm	5000lm
Fixture Wattage	34.2W	41.8W

Leto Light Distribution: Reflector

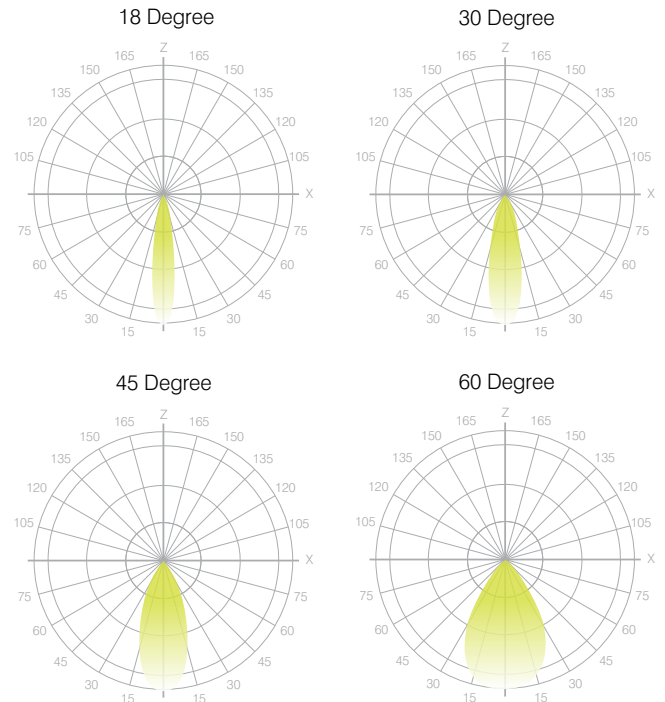

LETO 11

FAMILY

 **senso**
by luminii

