

LETO 11 Mini MP

SURFACE LED SPOTLIGHT



LETO 11 Mini MP - Surface Mount Spotlight. Leto 11 Mini MP offers an articulating, short-stem spotlight combined with a versatile and efficient LED. Excels in display based spaces like galleries, industrial and retail.

Ordering Code

Fixture	625								
	1	2	3	4	5	6	7		
Driver								--	--
	1	2	3	4	5	6	7	8	9

Product Specifications

SAMPLE: Fixture **625 - A90 - 717 - 27 - 07 - 08 - 01** | Driver **955 - 08 - 03 - 01 - 06 - STD - 120 - A90 - 07**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Body Color	7 - Baffle Color
625 · Leto 11 Mini Monopoint	A90 · Accuracy	717 · 17° 724 · 24° 760 · 60°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	07 · 700 (6W) 10 · 1000 (9W) 15 · 1500 (14W)	Standard Premium 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick XX · RAL	Standard Premium 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick XX · RAL
1 - Canopy Style	2 - Canopy Color	3 - Suspension Type	4 - Stem Color	5 - Stem Height		
955 · Round Slim* 955F · Round Flangeless** 954 · Round Semi-Recessed	Standard Premium 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick XX · RAL	03 · Solid Stem	Standard Premium 01 · White 52 · Mocha 02 · Black 53 · Charcoal 08 · Silver 54 · Cerulean 55 · Firebrick XX · RAL	01 · 1" 06 · 6" 12 · 12" 24 · 24" XX · Custom (in inches)		
6 - Driver	Dim Level	Dim Level	7 - Voltage	8 - LED	9 - Lumen	
STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase** ELDOLC · EldoLED 0 - 10 Volt	N/A 1% 1% 0.1%	DALI · Dali Protocol LUTES · HiLume Ecodigital* LUT2W · 2 Wire for phase**/2 LUT5S · 5 Series Eco System* 0.1% 1% 1% 5%	120 · 120V 277 · 277V	Same as Fixture	Same as Fixture	

*1 120V only

**2 remote mount

LETO 11 Mini MP

SURFACE LED SPOTLIGHT



Light Engine

- Output:** up to 1500lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K,
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety


Installation

- 330° of rotation and 80° of tilt
- Preset stem height between 1" and 24" OR custom heights available

Construction


- Machined aluminum construction
- Scratch resistant, satin powder coat finish
- Made in Canada

Dimensions

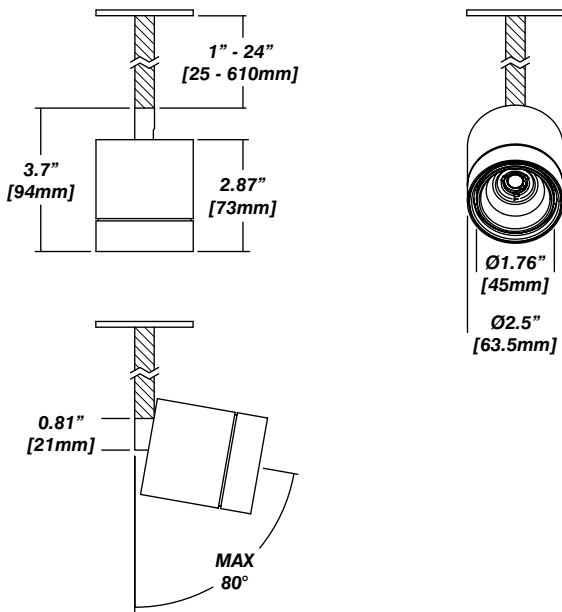


Canopy


955 - Round Slim

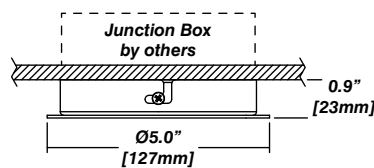

955F - Round Flangeless

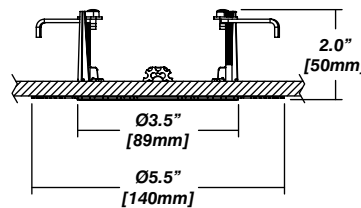

954 - Semi-Recessed + Cylinder Driver Housing

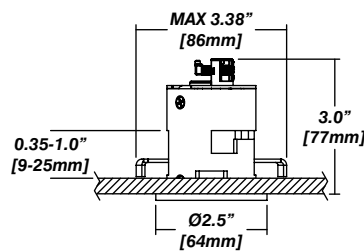

Ø2.125" [54mm]

CUT-OUT



LETO 11 Mini MP


SURFACE LED SPOTLIGHT





Senso Driver Housings

910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






Dimensions

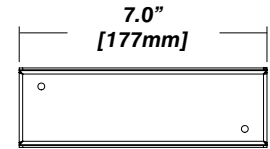



910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location

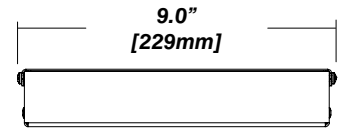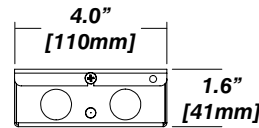

954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy

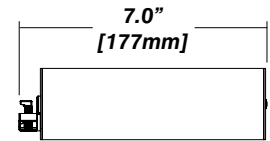

954 Driver Layouts


954 with Cylinder Driver Housing

- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing

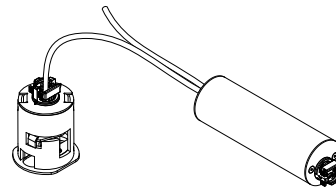

954 with Cylinder Driver Housing + 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

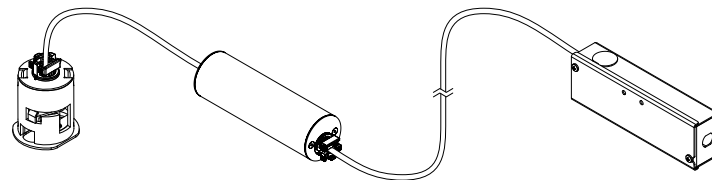

954 with Cylinder Driver Housing + 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

