


LETO 11 Mini P UD

DIRECT/INDIRECT PENDANT LED

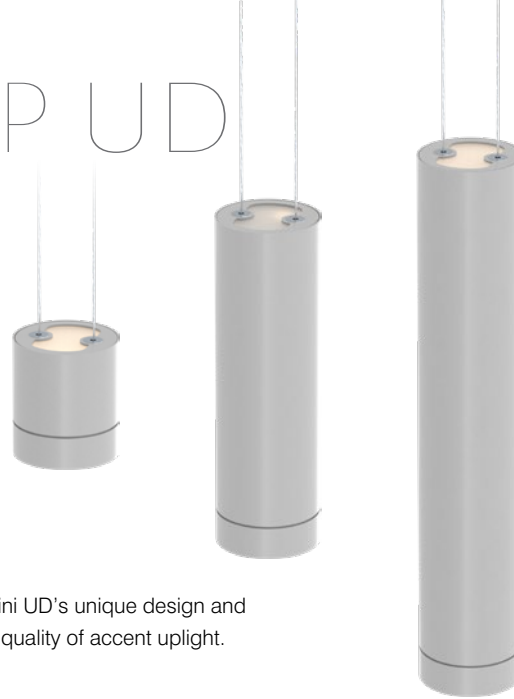

LETO 11 Mini P UD - Direct/Indirect Pendant LED Light. Leto 11 Mini UD's unique design and small profile gives it the utility of a powerful downlight with the aesthetic quality of accent uplight.

Ordering Code

| | | | | | | | | | |
|---------|------------|---|---|---|---|----|----|---|---|
| Fixture | 750 | | | | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Driver | | | | | | -- | -- | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | | |

Product Specifications

SAMPLE: Fixture **750 - S - A90 - 617 - 27 - 0505 - 00 - 08 - 02** | Driver **954 - 08 - 05 - STD - 120 - A90 - 0505**

| 1 - Model | 2 - Size | 3 - CRI/LED | 4 - Optic Direct | 5 - CCT | 6 - Lumen ^{*1/2} | 7 - Accessory ^{*3} |
|--|--|--|---|--|--|--|
| 750 · Leto 11 Mini UD Pendant | S · Small (73mm) ^{*1} M · Medium (209mm) L · Large (346mm) | A90 · Accuracy | 617 · 17° 624 · 24° 660 · 60° <i>No optic on up light</i> | 25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K | <i>Direct</i> 05 · 500 10 · 1000 <i>Indirect</i> 05 · 500 10 · 1000 | 00 · No Accessory DL · Diffusing Lens HO · Honeycomb |
| 8 - Body Color | 9 - Baffle Color | 1 - Canopy Style | | 2 - Canopy Color | | 3 - Suspension Type |
| <i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL | <i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL | 955 · Round Slim ^{*4} 955F · Round Flangeless ^{*4} 954 · Round Semi-Recessed | | <i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL | | 05 · 2 Powered Aircraft <i>8' cable included</i> <i>Contact SENSO for custom length</i> |
| 4 - Driver | Dim Level | | Dim Level | 5 - Voltage | 6 - CRI/LED | 7 - Lumen |
| STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ^{*5} ELDOLC · 0 - 10 Volt Protocol ^{*6} | N/A 1% 1% 0.1% | ELDODA · Dali Protocol ^{*6} LUTES · Hilume Ecodigital ^{*6} LUT2W · 2 Wire for phase ^{*5/6} LUT5S · 5 Series Eco System ^{*6} | 0.1% 1% 1% 5% | 120 · 120V 277 · 277V | Same as Fixture | Same as Fixture |

*1 small limited to 500lm direct/500lm indirect
*2 direct and indirect lumen must be the same
*3 accessories not available with small size
*4 small size always remote mount driver
*5 120V only
*6 remote mount

LETO 11 Mini P UD

DIRECT/INDIRECT PENDANT LED

Light Engine

- Output:** up to 1500lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

Installation


- Height adjustable powered aircraft cable included
- Pre-assembled for quick installation

Construction


- Machined aluminum construction
- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Made in Canada

Canopy



955 - Round Slim

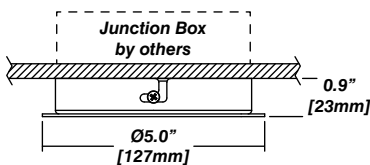

955F - Round Flangeless

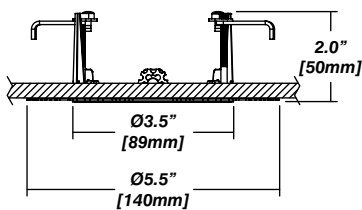


954 - Semi-Recessed + Cylinder Driver Housing




Dimensions


L - Large

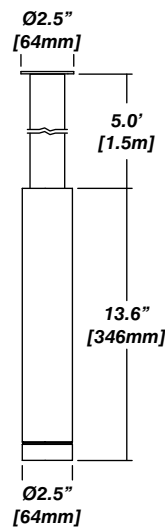


M - Medium

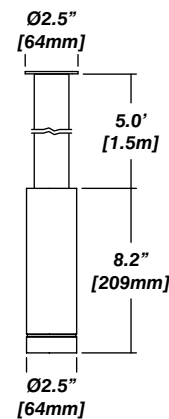


S - Small



Uplight



Downlight




Accessories

Frosted Lens



Honeycomb




LETO 11 Mini P U D

DIRECT/INDIRECT PENDANT LED



Senso Driver Housings

910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






Dimensions





910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location



954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy



954 Driver Layouts


954 with Cylinder Driver Housing

- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing



954 with Cylinder Driver Housing + 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

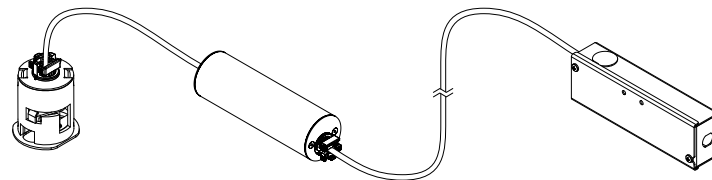

954 with Cylinder Driver Housing + 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

