

# LETO 11 Mini P

PENDANT LED DOWNLIGHT



**LETO 11 Mini - Pendant LED Light.** Leto 11 Mini is a slimmed down version of the Leto 11. This small, medium and tall pendant is slim and offers sleek minimalism to sitting and work areas with an efficient and powerful LED module.

## Ordering Code

Fixture	<b>691</b>								
	1	2	3	4	5	6	7	8	9
Driver							--	--	
	1	2	3	4	5	6	7	8	

## Product Specifications

**SAMPLE:** Fixture **691 - S - A90 - 617 - 27 - 07 - 00 - 08 - 02** | Driver **954 - 08 - 05 - 00 - STD - 120 - A90 - 07**

1 - Model	2 - Size	3 - CRI/LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory <sup>*1</sup>
<b>691</b> · Leto 11 Mini Pendant	<b>S</b> · Small (73mm) <sup>*1</sup> <b>M</b> · Medium (209mm) <b>L</b> · Large (346mm)	<b>A90</b> · Accuracy	<b>617</b> · 17° <b>624</b> · 24° <b>660</b> · 60°	<b>25</b> · 2500K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<b>07</b> · 700 (6W) <b>10</b> · 1000 (9W) <b>15</b> · 1500 (14W)	<b>00</b> · No Accessory <b>DL</b> · Diffusing Lens <b>HO</b> · Honeycomb
8 - Body Color	9 - Baffle Color	1 - Canopy Style	2 - Canopy Color	3 - Suspension Type		
<i>Standard</i> <b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <i>Premium</i> <b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	<i>Standard</i> <b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <i>Premium</i> <b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	<b>955</b> · Round Slim <b>955F</b> · Round Flangeless <sup>*2</sup> <b>954</b> · Round Semi-Recessed	<i>Standard</i> <b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <i>Premium</i> <b>52</b> · Mocha <b>53</b> · Charcoal <b>54</b> · Cerulean <b>55</b> · Firebrick <b>XX</b> · RAL	<b>00</b> · Feed Cable (6' incl.) <b>03</b> · Solid Stem (6' MAX) <b>05</b> · 2 Powered Aircraft <sup>*3</sup> (6' incl.) Contact SENSO for custom lengths		
4 - Suspension Color	5 - Driver	Dim Level	Dim Level	6 - Voltage	7 - CRI/LED	8 - Lumen
<b>00</b> · None <sup>*3</sup> <b>01</b> · White <b>02</b> · Black <b>03</b> · Clear <b>XX</b> · Custom	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase <sup>*4</sup> <b>ELDOLC</b> · EldoLED 0 - 10 Volt <sup>*5</sup> <b>DALI</b> · Dali Protocol <sup>*5</sup>	N/A 1% 1% 0.1% 0.1%	<b>LUTES</b> · Hilume Ecodigital <sup>*5</sup> <b>LUT2W</b> · 2 Wire for phase <sup>*4/5</sup> <b>LUT5S</b> · 5 Series Eco System <sup>*5</sup> <b>CSMB</b> · Casambi Wireless Control <sup>*6</sup>	1% 1% 5%	<b>120</b> · 120V <b>277</b> · 277V	Same as Fixture Same as Fixture

\*1 accessories not available with small size

\*2 small size always remote mount driver

\*3 no feed cable color option for **05** - 2 Powered Aircraft

\*4 120V only

\*5 remote mount

\*6 second driver required



# LETO 11 Mini P

PENDANT LED DOWNLIGHT

## Light Engine

- Output:** up to 1500lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K, 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

## Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety


## Installation

- Height adjustable feed cable, powered aircraft cable or solid stem included
- Pre-assembled for quick installation

## Construction


- Machined aluminum construction
- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Made in Canada

## Dimensions

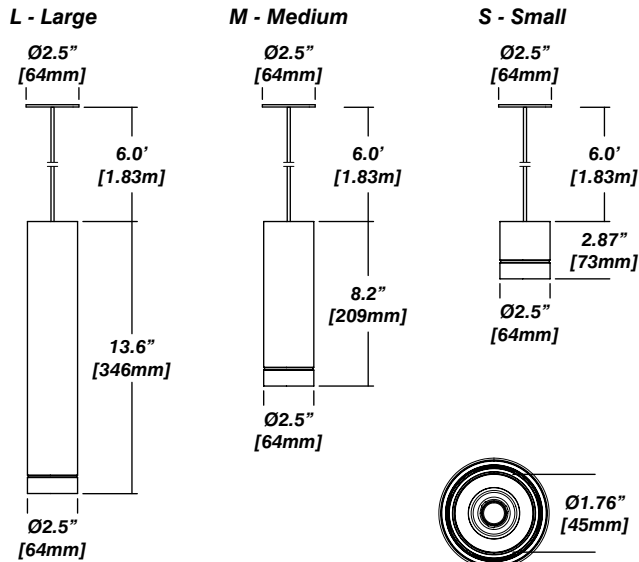


## Canopy



### 955 - Round Slim

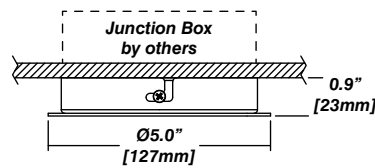

### 955F - Round Flangeless

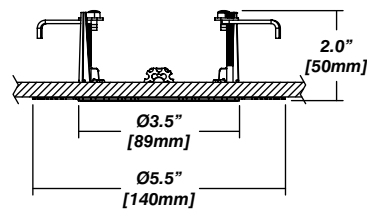


### 954 - Semi-Recessed + Cylinder Driver Housing

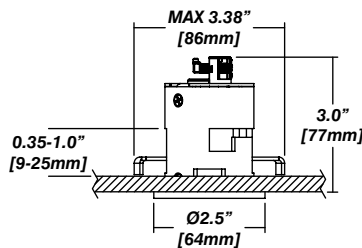


## Accessories

### Frosted Lens



### Honeycomb




# LETO 11 Mini P

PENDANT LED DOWNLIGHT



## Senso Driver Housings

### 910 - Single Remote Driver Housing

- Fits Standard, LCS or DIM drivers
- Galvanized steel enclosure
- Installed in remote location






## Dimensions





### 910 - Double Remote Driver Housing

- Fits all drivers
- Galvanized steel enclosure
- Installed in remote location



### 954 - Cylinder Driver Housing


- Supplied standard with every semi-recessed canopy
- Fits Standard, LCS or DIM drivers
- Extruded aluminum enclosure with strain relief to fixture
- Installed in ceiling beside canopy



## 954 Driver Layouts

### 954 with Cylinder Driver Housing


- Installed in ceiling beside canopy
- Driver mounted inside cylinder
- Dimming control wired from Cylinder Driver Housing



### 954 with Cylinder Driver Housing

#### + 910 Single Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

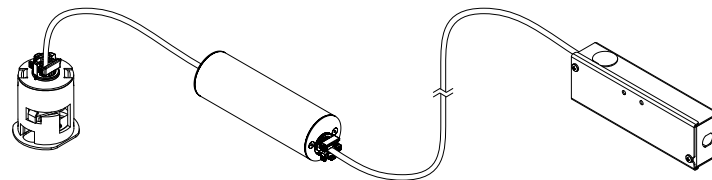

### 954 with Cylinder Driver Housing

#### + 910 Double Driver Housing

- Driver remotely mounted inside 910 housing
- Fed directly to 954 cylinder for DC connections (wire and strain reliefs supplied by others)

