

LETO 11 UD Adjustable

PENDANT LED UPLIGHT AND ADJUSTABLE DOWNLIGHT



Leto 11 UD - Uplight and Downlight Pendant LED Light. LETO 11 UD's unique design gives it the utility of a powerful downlight with the aesthetic quality of accent uplight.

Ordering Code

Fixture	892							
	1	2	3	4	5	6	7	8
Driver							--	--
	1	2	3	4	5	6	7	8

Product Specifications

SAMPLE: Fixture **892 - A90 - 61017 - 27 - 0707 - 00 - 08 - 08** | Driver **952 - 01 - 01 - STD - 120 - A90 - 0707**

1 - Model	2 - LED	3 - Optic		4 - CCT	5 - Lumen	6 - Accessory*2
892 · Leto 11 ADJ UD	A90 · 93+ CRI Accuracy	<i>Down</i>	<i>Up</i>	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	<i>Direct / Indirect</i> 0707 · 700/700 1010 · 1000/1000 1515 · 1500/1500 <small>For other direct / indirect possibilities please contact factory team</small>	00 · No Accessory DL · Diffusing Foil HO · Honeycomb SL · Solite Lens
		610 · 10° TIR*1	17 · 17°			
		618 · 18°	24 · 24°			
		630 · 30°	60 · 60°			
		645 · 45°				
		660 · 60°				
					<small>Wattage on page 3</small>	

7 - Body Color		8 - Baffle Color		1 - Canopy Style	2 - Canopy Color		3 - Suspension (6' incl.)
<i>Standard</i>	<i>Premium</i>	<i>Standard</i>	<i>Premium</i>	951 · Round 951F · Round Flangeless*5 952 · Square	<i>Standard</i>	<i>Premium</i>	02 · 2 Aircraft + Feed Cable 05 · 2 Powered Aircraft*3 <small>Contact Senso for custom length</small>
01 · White 02 · Black 08 · Silver	52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	01 · White 02 · Black 08 · Silver	52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL		01 · White 02 · Black 08 · Silver	52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	

4 - Feed Cable	5 - Driver		6 - Voltage	7 - LED	8 - Lumen	
00 · None*3 01 · White 02 · Black 03 · Clear XX · Custom	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase*4 ELDOLC · EldoLED 0 - 10 Volt*5 DALI · Dali Protocol*5	Dim Level N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital*5 DMX · SENSO*5 EMG · Emergency Driver*5/6 CSMB · Casambi Wireless Control*5/6	Dim Level 1% 1% 1% 1%	120 · 120V 277 · 277V 347 · 347V*5/7	Same as Fixture Same as Fixture

*1 TIR 2000lm MAX

*2 available on downlight only

*3 no feed cable color option for **05** - 2 Powered Aircraft

*4 120V only

*5 remote mount driver

*6 second driver required

*7 not available with ELDO, Lutron or DMX



LETO 11 UD Adjustable



PENDANT LED UPLIGHT AND ADJUSTABLE DOWNLIGHT

Canopy / Suspension

Round Canopy: W - Ø5.17" [131.24 mm] / H - 2.36" [60mm]

Drivers mounted in the Round Canopy: **STD, LCS, DIM**

Drivers remote mounted: **ELDOLC, DALI, LUTES, DMX, EMG, CSMB**

Square Canopy: W/L - 5.67" [144mm] / H - 2.28" [58mm]


Drivers mounted in the Square Canopy: **STD, LCS, DIM, ELDOLC, DALI, LUTES**

Drivers remote mounted: **DMX, EMG, CSMB**


Round Flangless: W - Ø2.53" [64.25 mm]

All drivers remote mount

2 Aircraft Cable
w/ Feed Cable



2 Powered
Aircraft Cable



Reflectors

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

Faceted Reflector






Installation

- The included canopy fits on a standard junction box
- Height adjustable dual-aircraft cable included
- Electrical feed cable included
- 360 degree rotation with up to 30 degrees of tilt

Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

Dimensions

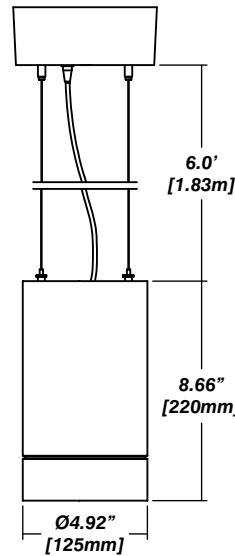

Accessories

Diffusing Lens



Honeycomb Mesh



Solite Lens



LETO 11 UD Adjustable



PENDANT LED UPLIGHT AND ADJUSTABLE DOWNLIGHT

Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

Output: Up to 104 lumen/Watt

Efficacy: Color consistency within a 3-MacAdam Ellipse

CCT: 2500K - 6500K

Color Rendering: 93+ CRI

Min. R Values: R⁹ - 60 R¹ - 90 R⁹ - 100

Driver and Power Consumption


Dimming: 1% dimming standard with 0.1% option
Casambi wireless control available

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9
Efficiency over 85%
Class 2 output for safety

Installation: Remote mounted

Leto Light Distribution: Reflector

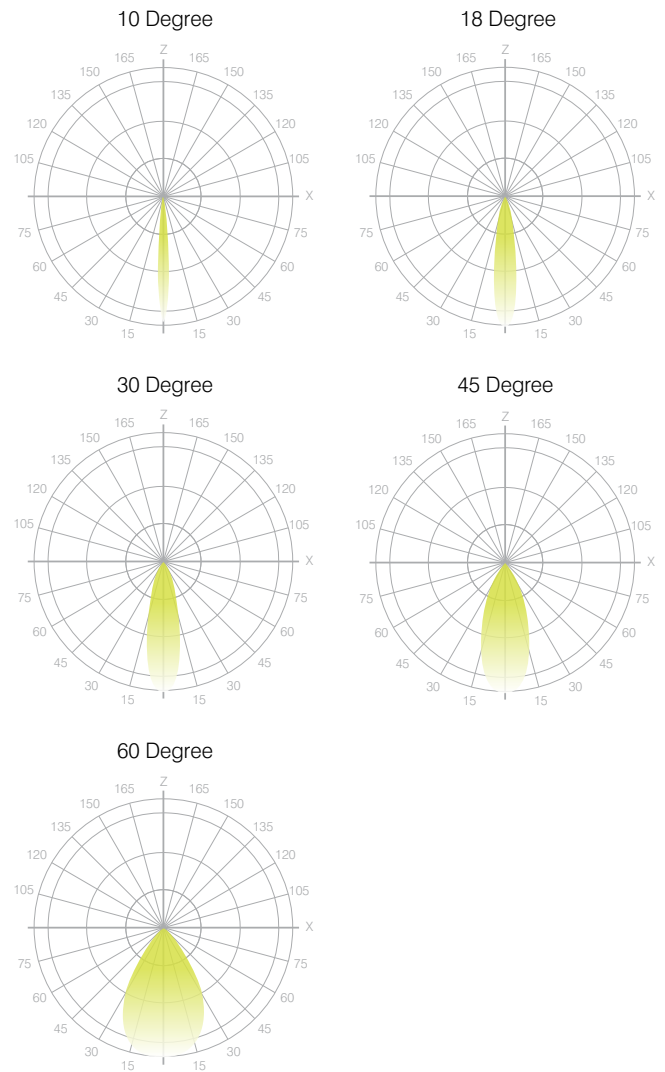

Lumen Option	700/700	1000/1000	1500/1500
Fixture Wattage	12.2W	18.2W	30W
Delivered Lumen	1270lm	1851lm	2810lm