


LETO 21

DOUBLE

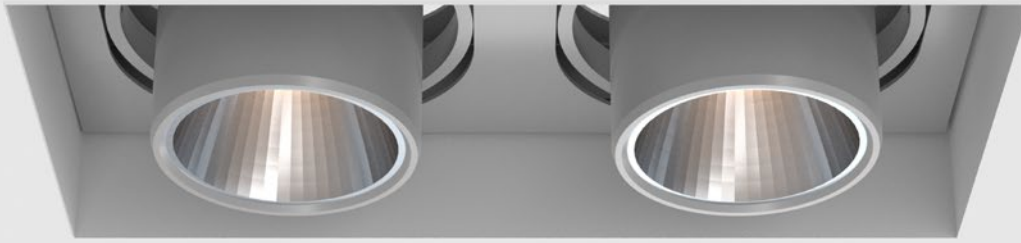

Leto 21 Double - Recessed Adjustable downlight. LETO 21 Double is a rectangle trimless recessed LED fixture. It is fully adjustable to 30°, designed to be architecturally pleasing with trimless application. It can be used for general lighting, or to highlight specific design areas.

Ordering Code

| | | | | | | | |
|---------|------------|------------|---|---|----|----|----|
| Fixture | 602 | | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | |
| Driver | | 602 | | | -- | -- | -- |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 |

Product Specifications

SAMPLE: Fixture **602 - A90 - 618 - 27 - 07 - 01** | Driver **915 - 602 - STD - 120 - A90 - 07 - 01**

| 1 - Model | 2 - LED | 3 - Optic | 4 - CCT | 5 - Lumen | 6 - Finish | 1 - Housing Style | 2 - Model |
|-----------------------------|-------------------------------|--|--|---|--|-------------------------------|-----------------------------|
| 602 · Leto 21 Double | A90 · 93+ CRI Accuracy | 618 · 18° 630 · 30° 645 · 45° 660 · 60° | 25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K | 07 · 700 (7.5W) 10 · 1000 (10.8W) 15 · 1500 (16.7W) 20 · 2000 (22W) 30 · 3000 (33.7W) <i>Lumen and wattage per head</i> | 01 · White 02 · Black 08 · Silver XX · Custom | 915 · New Construction | 602 · Leto 21 Double |

| 3 - Driver | Dim Level | Dim Level | 4 - Line Voltage | 5 - LED | 6 - Lumen | 7 - Finish |
|---|-----------|--|---------------------------------|-----------------|-----------------|-----------------|
| STD · Non Dimming | N/A | LUTES · Hilume Ecodigital ^{*2} | 120 · 120V | Same as Fixture | Same as Fixture | Same as Fixture |
| LCS · 0 - 10 Volt Protocol | 1% | LUT2W · 2 Wire for phase ^{*1/2} | 277 · 277V | | | |
| DIM · Phase ^{*1} | 10% | DMX · SENSO ^{*2} | 347 · 347V ^{*4} | | | |
| ELDOLC · EldoLED 0 - 10 Volt ^{*2} | 0.1% | EMG · Emergency Driver ^{*2/3} | | | | |
| DALI · Dali Protocol ^{*2} | 0.1% | CSMB · Casambi Wireless Control ^{*2/3} | | | | |

*1 120V only
*2 Requires remote housing
*3 Specified separately
*4 Not available with ELDO, Lutron or DMX

Project : _____
Quantity : _____
Type : _____
Notes : _____



Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

Light Engine

Output: up to 3000lm

High Efficacy: up to 92 lumen/Watt

Color Options (CCT): 2500K, 2700K, 3000K, 3500K, 4000K or 6500K

Color Consistency: Range within a 3-MacAdam Ellipse

Color rendering (CRI): 93+ CRI & 50+ R9 Value

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9

Efficiency over 85%

Class 2 output for safety

| Lumen Option | 700lm | 1000lm | 1500lm | 2000lm | 3000lm |
|-----------------|-------|--------|--------|--------|--------|
| Fixture Wattage | 7.5W | 10.8W | 16.7W | 22W | 33.7W |
| Delivered Lumen | 683lm | 992lm | 1474lm | 1935lm | 2798lm |



Installation

- For new installations only
- Fully 30° angle adjustable spot, 360° rotation
- Simple connection between fixture and driver via quick connect
- Available for wet rated in single version.

Construction / Finish

- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Made in Canada


Dimensions

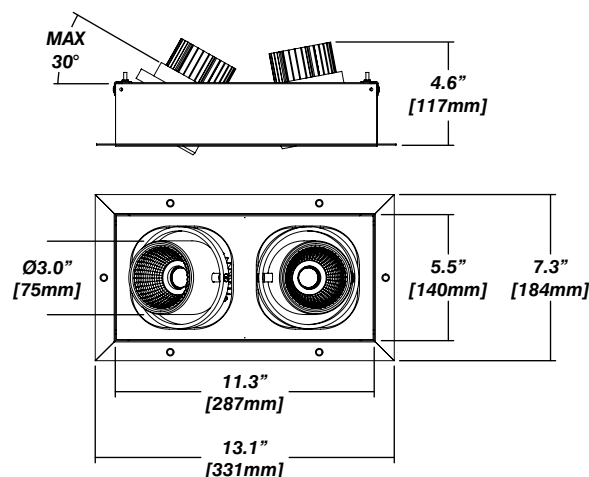

Reflector


Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency





Housing Options

New Construction - 915

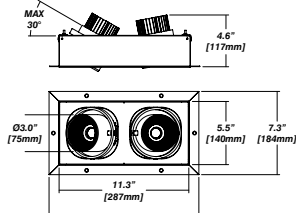

Dimension

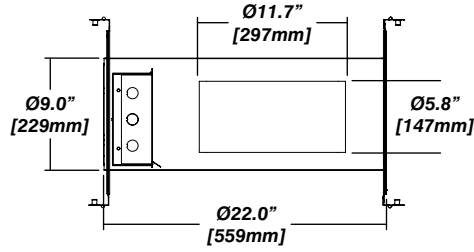

Included

- Plaster Frame**
 - Galvanized steel construction with cut-out to
- Bar hanger**
 - Length: from 14-3/16" to 26"
- Security wire**
 - Flexible aircraft cable, 12" long
 - Easy to clip snap body included