

**Leto 22 - Recessed downlight.** LETO 22 is a square trimless recessed LED fixture with a small round aperture that permits refined glare control and precision light distribution.

## Ordering Code

Fixture	<b>603</b>						
	1	2	3	4	5	6	
Driver		<b>603</b>			--	--	--
	1	2	3	4	5	6	7

## Product Specifications

**SAMPLE:** Fixture **603 - 90 - 618 - 27 - 07 - 01** | Driver **915 - 603 - STD - 120 - 90 - 07 - 01**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Finish	1 - Housing Style	2 - Model
<b>603</b> · Leto 22	<b>90</b> · Designer <b>83V</b> · Vibrancy <sup>*2</sup> <b>98</b> · Artist 98+ <b>98V</b> · Vibrancy/Artist <sup>*2</sup> <b>98B</b> · Beauty <sup>*7</sup>	<b>618</b> · 18° <b>630</b> · 30° <b>645</b> · 45° <b>660</b> · 60°	<b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K	<b>07</b> · 700 (4.5W) <b>10</b> · 1000 (6.6W) <b>13</b> · 1300 (9.5W) <b>20</b> · 2000 (15.2W) <b>30</b> · 3000 <sup>*3</sup> (25.7W)	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom	<b>915</b> · New Construction	<b>603</b> · Leto 22

3 - Driver	Dim Level		Dim Level	4 - Line Voltage	5 - LED	6 - Lumen	7 - Finish
<b>STD</b> · Non Dimming	N/A	<b>LUTES</b> · Hilume Ecodigital	1%	<b>120</b> · 120V	Same as	Same as	Same as
<b>LCS</b> · 0 - 10 Volt Protocol	1%	<b>LUT2W</b> · 2 Wire for phase <sup>*4</sup>	1%	<b>277</b> · 277V	Fixture	Fixture	Fixture
<b>DIM</b> · Phase <sup>*4</sup>	1%	<b>LUT5S</b> · 5 Series Eco System	5%	<b>347</b> · 347V <sup>*7</sup>			
<b>ELDOLC</b> · EldoLED 0 - 10 Volt	0.1%	<b>DMX</b> · SENSO					
<b>DALI</b> · Dali Protocol	0.1%	<b>EMG</b> · Emergency Driver <sup>*5/6</sup>					

\*1 Only available in 2700K

\*2 Only available in 3000K

\*3 Not available with Beauty Module

\*4 120V only

\*5 Requires remote housing

\*6 Specified separately

\*7 Not available with ELDO, Lutron or DMX

Project : \_\_\_\_\_  
 Quantity : \_\_\_\_\_  
 Type : \_\_\_\_\_  
 Notes : \_\_\_\_\_  
 \_\_\_\_\_

## Performance Modules



**Designer** - The Designer module is custom formulated to provide outstanding color rendering while retaining high efficacy.

**Output:** Up to 125 lumen/Watt

**Efficacy:** Color consistency within 1x2 MacAdam Ellipses

**CCT:** 2700K - 4000K

**Color Rendering:** 90+ CRI

**Min. R Values:** R<sup>9</sup> - 55 R<sup>1</sup> - 88 R<sup>9</sup> - 101

## Specialized Modules

**Artist** - Artist module is virtually Indistinguishable from halogen light, and delivers high quality, natural light that is efficient and long lasting.

**Vibrancy** - Vibrancy Series enables us to see colors, hues and tones, that are real, but simply aren't visible under halogen light.

**Beauty** - Beauty Series makes it possible to precisely tune the spectrum to deliver extraordinary clarity and fidelity for settings where people are the focus.

**CCT:** 2700 - 4000  
**CRI:** 95+  
**Min. R Values**  
**R<sup>9</sup>:** 95  
**R<sup>1</sup>:** 96  
**R<sup>9</sup>:** 103

**CCT:** 3000  
**CRI:** 80+, 95+  
**Min. R Values**  
*80 CRI / 95 CRI*  
**R<sup>9</sup>:** 28 / 96  
**R<sup>1</sup>:** 73 / 96  
**R<sup>9</sup>:** 105 / 103

**CCT:** 2700  
**CRI:** 93+  
**Min. R Values**  
**R<sup>9</sup>:** 95  
**R<sup>1</sup>:** 91  
**R<sup>9</sup>:** 107

## Driver and Power Consumption


**Dimming:** 1% dimming standard with 0.1% option  
**Ripple:** Industry leading Low ripple  
**Efficiency:** Power Factor >0.9  
 Efficiency over 85%  
 Class 2 output for safety

	Lumen Option	700lm	1000lm	1300lm	2000lm	3000lm
<b>90 CRI Designer</b>	Fixture Wattage	7.7W	11.0W	14.5W	20.5W	30.1W
	Delivered Lumen	725lm	965lm	1313lm	1840lm	2493lm


## Reflector

### Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency



## Dimensions

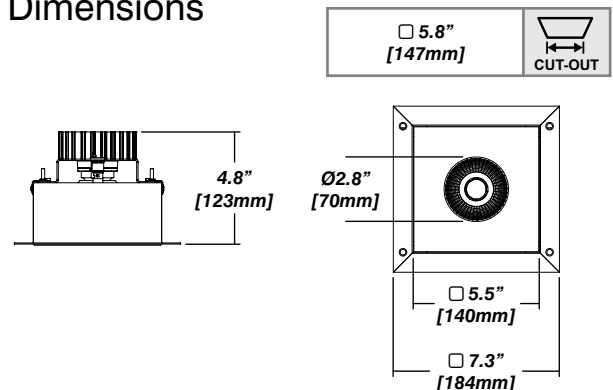

## Installation


- For new installations only
- Simple connection between fixture and driver via quick connect

## Construction / Finish


- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Made in Canada

## Housing Options

### New Construction - 915




#### Dimension

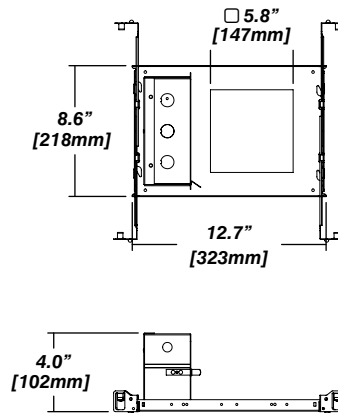


#### Included

- Plaster Frame**
  - Galvanized steel construction with cut-out to
- Bar hanger**
  - Length: from 14-3/16" to 26"
- Security wire**
  - Flexible aircraft cable, 12" long
  - Easy to clip snap body included

### IC Housing - 920



#### Dimension

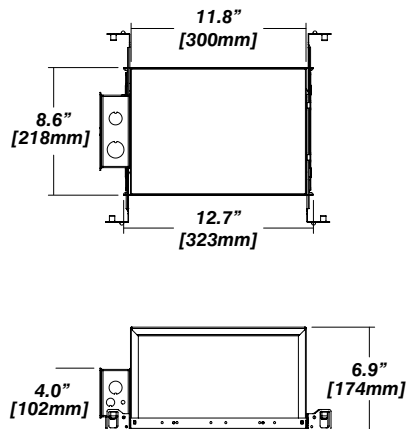

#### Included

- IC Housing**
  - Galvanized steel construction
  - Airtight
  - Includes gasketed junction box
- Plaster Frame**
  - Galvanized steel construction
- Bar hanger**
  - Length: from 14-3/16" to 26"

**Note:** Lumen output cannot exceed 1300lm