



Leto 24 - Recessed downlight. LETO 24 is a trimless recessed, square, wall-washer fixture that create an even, non-scalloped wall-washing effect.

Ordering Code

Fixture	607						
	1	2	3	4	5	6	
Driver		607			--	--	--
	1	2	3	4	5	6	7

Product Specifications

SAMPLE: Fixture **607 - 90 - 618 - 27 - 07 - 01** | Driver **915 - 607 - STD - 120 - 90 - 07 - 01**

1 - Model	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Finish	1 - Housing Style
607 · Leto 24	90 · Designer 83V · Vibrancy* ² 98 · Artist 98+ 98V · Vibrancy/Artist* ² 98B · Beauty* ⁷	618 · 18°	27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K	07 · 700 (4.5W) 10 · 1000 (6.6W) 13 · 1300 (9.5W) 20 · 2000 (15.2W) 30 · 3000* ³ (25.7W)	01 · White 02 · Black 08 · Silver XX · Custom	915 · New Construction

2 - Model	3 - Driver	Dim Level	Dim Level	4 - Line Voltage	5 - LED	6 - Lumen
607 · Leto 24	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase* ⁴ ELDOLC · EldoLED 0 - 10 Volt DALI · Dali Protocol	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital LUT2W · 2 Wire for phase LUT5S · 5 Series Eco System DMX · SENSO EMG · Emergency Driver* ^{5/6}	1% 1% 5%	120 · 120V 277 · 277V 347 · 347V* ⁷	Same as Fixture Same as Fixture

*1 Only available in 2700K

*2 Only available in 3000K

*3 Not available with Beauty Module

*4 120V only

*5 Requires remote housing

*6 Specified separately

*7 Not available with ELDO, Lutron or DMX

Project : _____
 Quantity : _____
 Type : _____
 Notes : _____

Performance Modules



Designer - The Designer module is custom formulated to provide outstanding color rendering while retaining high efficacy.

Output: Up to 125 lumen/Watt

Efficacy: Color consistency within 1x2 MacAdam Ellipses

CCT: 2700K - 4000K

Color Rendering: 90+ CRI

Min. R Values: R⁹ - 55 R¹ - 88 R⁹ - 101

Specialized Modules

Artist - Artist module is virtually Indistinguishable from halogen light, and delivers high quality, natural light that is efficient and long lasting.

Vibrancy - Vibrancy Series enables us to see colors, hues and tones, that are real, but simply aren't visible under halogen light.

Beauty - Beauty Series makes it possible to precisely tune the spectrum to deliver extraordinary clarity and fidelity for settings where people are the focus.

CCT: 2700 - 4000
CRI: 95+
Min. R Values:
 R⁹: 95
 R¹: 96
 R⁹: 103

CCT: 3000
CRI: 80+, 95+
Min. R Values:
 80 CRI / 95 CRI
 R⁹: 28 / 96
 R¹: 73 / 96
 R⁹: 105 / 103

CCT: 2700
CRI: 93+
Min. R Values:
 R⁹: 95
 R¹: 91
 R⁹: 107

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9

Efficiency over 85%


Class 2 output for safety

	Lumen Option	700lm	1000lm	1300lm	2000lm	3000lm
90 CRI Designer	Fixture Wattage	7.7W	11.0W	14.5W	20.5W	30.1W
	Delivered Lumen	725lm	965lm	1313lm	1840lm	2493lm


Reflector

Faceted Reflector

Senso metal spun reflectors for function, low glare and efficiency



Dimensions

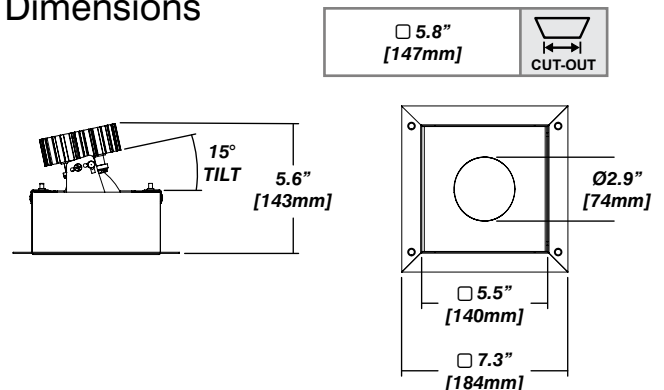

Installation


- For new installations only
- Simple connection between fixture and driver via quick connect
- 18° reflector with 18° fixed tilt angle

Construction / Finish


- Custom finishes are available
- Cast Aluminum Trim and Steel Casing
- Made in Canada

Housing Options

New Construction - 915




Dimension

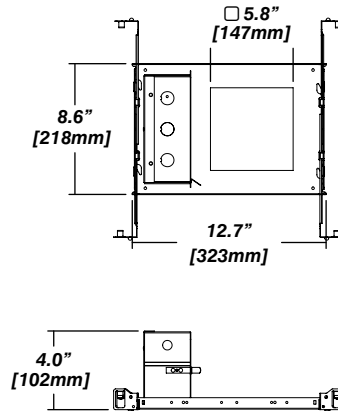


Included

- Plaster Frame** • Galvanized steel construction with cut-out to
- Bar hanger** • Length: from 14-3/16" to 26"
- Security wire** • Flexible aircraft cable, 12" long
- Easy to clip snap body included

IC Housing - 920



Dimension

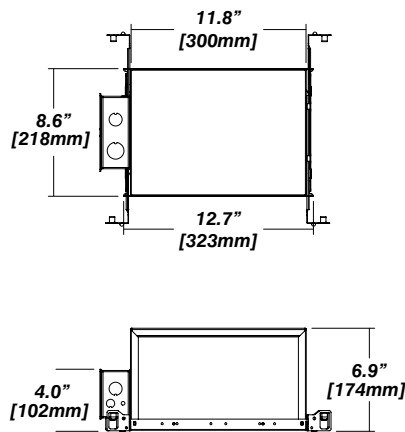

Included

- IC Housing** • Galvanized steel construction
- Airtight
- Includes gasketed junction box
- Plaster Frame** • Galvanized steel construction
- Bar hanger** • Length: from 14-3/16" to 26"

Note: Lumen output cannot exceed 1300lm