


LETO 44 P LRG

PENDANT LED DOWNLIGHT

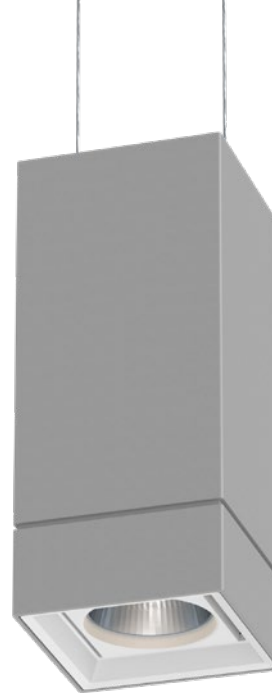

Leto 44 P LRG - Pendant LED Downlight. Solid, striking and bold, Leto 44 P LRG is the flagship of the Leto 44 Range. Its tall and slender figure mixed with hard lines will make a statement in any space.

Ordering Code

| | | | | | | | | |
|---------|------------|---|---|---|---|---|----|----|
| Fixture | 702 | | | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| Driver | | | | | | | -- | -- |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |

Product Specifications

SAMPLE: Fixture **702 - A90 - 615 - 27 - 07 - DL - 08 - 01** | Driver **952 - 08 - 02 - 01 - STD - 120 - A90 - 07**

| 1 - Model | 2 - LED | 3 - Optic | 4 - CCT | 5 - Lumen | 6 - Accessory |
|------------------------------------|-----------------------|--|--|---|--|
| 702 · Leto 44 Large Pendant | A90 · Accuracy | 615 · 15° 630 · 30° 645 · 45° 660 · 60° | 25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K | 07 · 700 (6.5W) 10 · 1000 (9.3W) 15 · 1500 (12.5W) 20 · 2000 (20.2W) 30 · 3000 (32.7W) 35 · 3500 (33.6W) | 00 · No Accessory DL · Diffusing Lens H0 · Honeycomb SL · Solite Lens |

| 7 - Body Color | | 8 - Baffle Color | | 1 - Canopy Style | 2 - Canopy Color | | 3 - Suspension (6' incl.) |
|--|---|--|---|---------------------|--|---|---|
| <i>Standard</i> | <i>Premium</i> | <i>Standard</i> | <i>Premium</i> | 956 · Square | <i>Standard</i> | <i>Premium</i> | 02 · 2 Aircraft + Feed Cable 03 · Solid Stem (6' MAX) 04 · Hang Straight Solid Stem 05 · 2 Powered Aircraft* <i>Contact Senso for specific length</i> |
| 01 · White 02 · Black 08 · Silver | 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL | 01 · White 02 · Black 08 · Silver | 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL | | 01 · White 02 · Black 08 · Silver | 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL | |

| 4 - Feed Cable | 5 - Driver | | Dim Level | | 6 - Voltage | 7 - LED | 8 - Lumen |
|--|---|---------------------------------------|--|----------------------------|---|-----------------|-----------------|
| 00 · None* 01 · White 02 · Black 03 · Clear XX · Custom | STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase** ELDOLC · EldoLED 0 - 10 Volt DALI · Dali Protocol LUTES · Hilume Ecodigital | N/A 1% 1% 0.1% 0.1% 1% | LUT2W · 2 Wire for phase** LUT5S · 5 Series Eco System DMX · Senso** EMG · Emergency Driver** CSMB · Casambi Wireless Control** | 1% 5% 1% 1% 1% | 120 · 120V 277 · 277V 347 · 347V** | Same as Fixture | Same as Fixture |

*1 no feed cable color option for **05** - 2 Powered Aircraft
*2 120V only
*3 remote mount
*4 second driver required
*5 not available with ELDO, Lutron or DMX

LETO 44 P LRG

PENDANT LED DOWNLIGHT

Canopy

Square Canopy

2 Aircraft Cable
w/ Feed Cable

2 Powered
Aircraft Cable


Solid Stem

Hang Straight
Solid Stem




Suspension


2 Aircraft Cable
w/ Feed Cable



Solid Stem



2 Powered Aircraft




Installation

- The included canopy fits on a standard junction box
- Height adjustable aircraft cable, feed cable or solid stem suspension (specify height) included
- Electrical feed cable included

Construction / Finish


- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Aluminum extruded Body
- Made in Canada

Dimensions

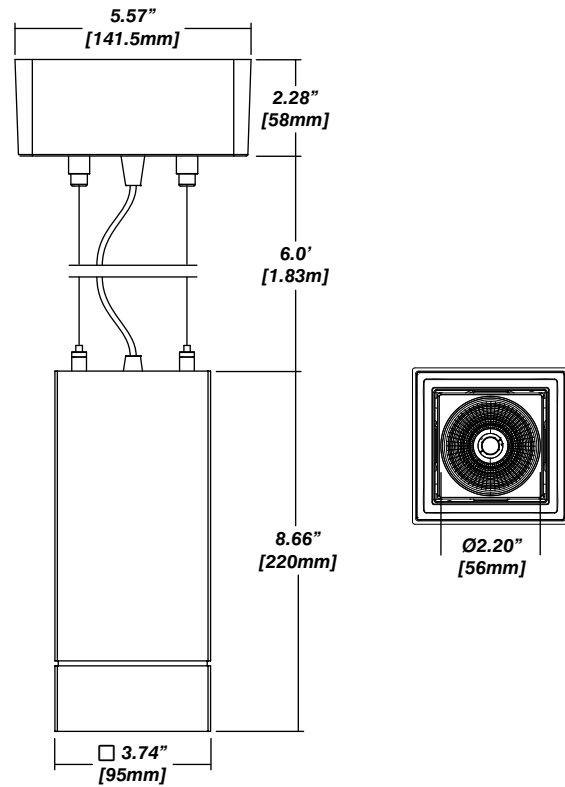


Accessories


Diffusing Lens



Honeycomb Mesh




Solite Lens

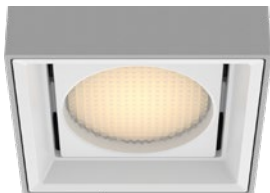

Reflector

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

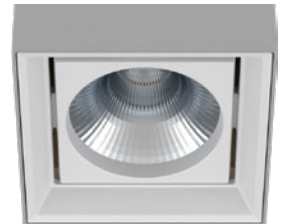

LETO 44 P LRG

PENDANT LED DOWNLIGHT




Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Leto 44 Light Distribution

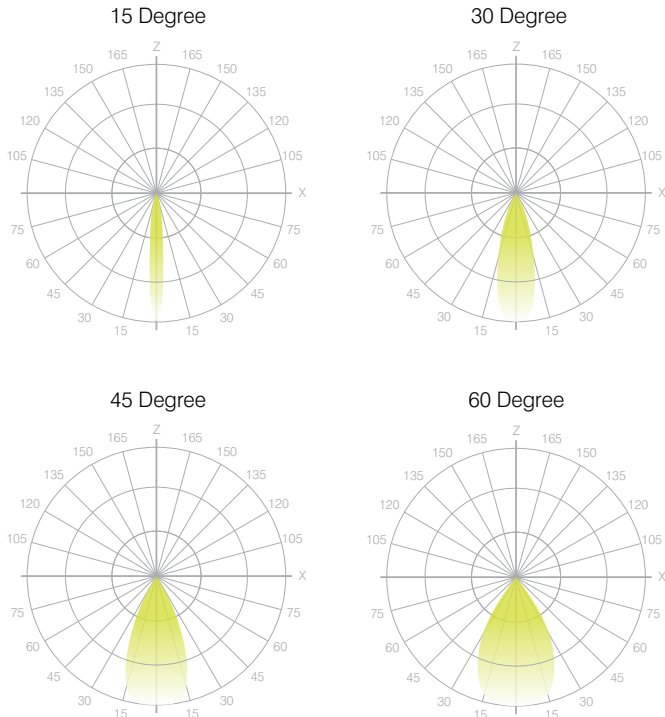

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

- Output:** Up to 150 lumen/Watt
- Efficacy:** Color consistency within a 3-MacAdam Ellipse
- CCT:** 2500K - 6500K
- Color Rendering:** 90+ CRI
- Min. R Values:** R⁹ - 60 R^f - 90 R^a - 100

Driver and Power Consumption

- Dimming:** 1% dimming standard with 0.1% option
Casambi wireless control available
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Remote mounted

| | | | | | | |
|------------------------|-------|--------|--------|--------|--------|--------|
| Lumen Option | 700lm | 1000lm | 1500lm | 2000lm | 3000lm | 3500lm |
| Fixture Wattage | 6.5W | 9.3W | 12.5W | 20.2W | 32.7W | 33.6W |
| Delivered Lumen | 656lm | 1035lm | 1347lm | 1917lm | 2741lm | |