


# LETO 11

## SUSPENDED ASYMMETRIC LED CYLINDER

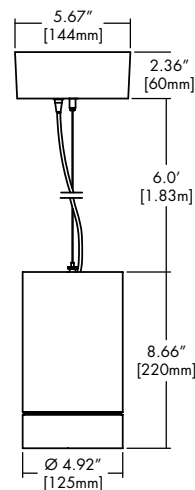

### Features

- Nine drivers selections available to cover wide range of applications.
- Three output options available up to 1300 lumens.
- Five year warranty.

### Finish Options

- White
- Black
- Silver
- Mocha
- Charcoal
- Cerulean
- Firebrick



### Technical Information

OUTPUT OPTIONS	700 lm	1000lm	1300lm
<b>Fixture wattage</b>	6.1 W	9.1 W	14.6 W
<b>Delivered Lumen at full on</b>	568 lm	837 lm	1262 lm
<b>Efficacy</b>	93 lm/W	92 lm/W	90 lm/W
<b>Center Beam Candlepower (18° Faceted Reflector)</b>	842 cd	1241 cd	1764 cd

CCT	Multiplier	CRI	TM-30		
			R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
2500K	0.81	92	90	104	77
2700K	0.92	92	91	102	61
3000K	0.97	95	92	102	61
3500K	1.00	95	93	101	72
4000K	1.07	95	92	103	68
6500K	1.05	96	91	100	89

Integral Driver Example: Fixture LET11-S-07-25K-ASM-DL-WH-WH-RD-WH-2AF-NA-PHSD-NA  
 Remote Driver Example: Fixture LET11-S-07-25K-ASM-DL-WH-WH-RD-WH-2AF-NA-010L-NA  
 HRM-LET11-S-07-25K-01-0L-NA

### Ordering Code

#### Fixture

MODEL	TYPE	OUTPUT	CCT	OPTIC	ACCESSORY	BODY FINISH	BAFFLE FINISH
LET11 - Leto 11	S - Suspended	07 - 700 lumens (6.1W) <sup>1</sup> 10 - 1000 lumens (9.1W) 13 - 1300 lumens (14.6W)	25K - 2500K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 65K - 6500K	ASM - Asymmetric	DL - Diffusing Lens	Standard WH - White BK - Black SL - Silver  Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	Standard WH - White BK - Black SL - Silver  Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
RD - Round RTL - Round Trimless <sup>3,5</sup> SQ - Square	Standard WH - White BK - Black SL - Silver  Premium <sup>2</sup> MA - Mocha CC - Charcoal CR - Cerulean FB - Firebrick	2AF - 2AC+Feed Cable SS2 - Solid Stem, 2ft SS3 - Solid Stem, 3ft SS6 - Solid Stem, 6ft HS2 - Hang Straight, 2ft <sup>5</sup> HS3 - Hang Straight, 3ft <sup>5</sup> HS6 - Hang Straight, 6ft <sup>5</sup> POA - 2 Powered Aircraft	Standard NA - None <sup>7</sup> CL - Clear <sup>11</sup> WH - White BK - Black SL - Silver <sup>4</sup>  Premium <sup>2</sup> MA - Mocha <sup>4</sup> CC - Charcoal <sup>4</sup> CR - Cerulean <sup>4</sup> FB - Firebrick <sup>4</sup>	PHSD - Forward/Reverse Phase, 1% Dimming, 120V Only 010S - 0-10V, 1% Dimming, 120/277V 0103 - 0-10V, 1% Dimming, 347V Only 010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V <sup>4</sup> 010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V <sup>4</sup> DALI - EldoLED, DALI Protocol 2, DT-6, 0.1% Dimming, 120/277V DALI8 - EldoLED, DALI Protocol 2, DT-8, 0.1% Dimming, 120/277V <sup>3</sup> LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V <sup>3</sup>	NA - None EMG - Emergency Driver <sup>3,8</sup> CSMB - Casambi <sup>9,10</sup> AWN - Athena <sup>9</sup>

1 - 700 lumens is not available with LUTE driver.  
 2 - Premium finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.  
 3 - All drivers remote mounted when using RTL canopy, DALI8 driver, DMX driver, or EMG driver options.  
 4 - Requires square canopy SQ for integral driver, otherwise remote mounted.  
 5 - RTL canopy is not available with HS2/HS3/HS6 suspension.  
 6 - These finishes are only available with SS Solid Stem and HS Hang Straight.  
 7 - Must select NA None when POA option is selected.  
 8 - Emergency option comes prewired from factory with driver in remote housing. 8W of continuous power provided for a minimum of 90 minutes. Must be installed within 30 feet of luminaire using 18 AWG wire. Not available with 0103, DMX, DALI8 or LUTE Driver.  
 9 - AWNR/CSMB only available with 010S driver and RD/SQ canopy.  
 10 - AWNR/CSMB available upon request with RTL canopy.  
 11 - Clear Suspension Finish only available with 2AF.

CONTACT FACTORY FOR MORE OPTIONS.


# LETO 11

SUSPENDED ASYMMETRIC LED CYLINDER

## Canopy


### RD

Round Canopy

 2.36" 60mm Ø5.17" 131mm	Integral Drivers	Remote Drivers
		010S 0103 PHSD


### RTL

Round Trimless Canopy

 Ø5.17" 131mm	Integral Drivers	Remote Drivers
		N/A

### SQ

Square Canopy

 2.28" 58mm 5.67" 144mm	Integral Drivers	Remote Drivers
		010S 0103 PHSD 010L 010G DALI DALI8 LUTE

Please see next page for Remote Driver Housing details.

## Suspension

### 2AF

2 Aircraft + Feed Cable

### SSX (2', 3', 6' max)

Solid Stem

### HSX (2', 3', 6' max)

Hang Straight Solid Stem

### POA

2 Powered Aircraft



Maximum Slope: 15°

## Lens

### DL

Diffusing Lens



Light Loss Factor: 87%\*

\*Light Loss Factor calculated with 60° faceted reflector.


## Remote Driver Housing

Depending on the options selected in the order code on page 1, a Remote Driver Housing may be required. This will automatically be generated and put on your order as necessary.

REMOTE DRIVER	MODEL	OUTPUT	CCT	DRIVER	DRIVER OPTIONS
HRM-Housing, Remote	LET11-S-letto 11 Suspended	Same as Fixture	Same as Fixture	Same as Fixture	Same as Fixture


Maximum mounting distance to luminaire using 18 AWG wire						
010S	PHSD	010L	010G	DALI DALI8	DMX	LUTE
16'	16'	72'	72'	72'	149'	15'

### HRM Single with Externally Mounted Driver

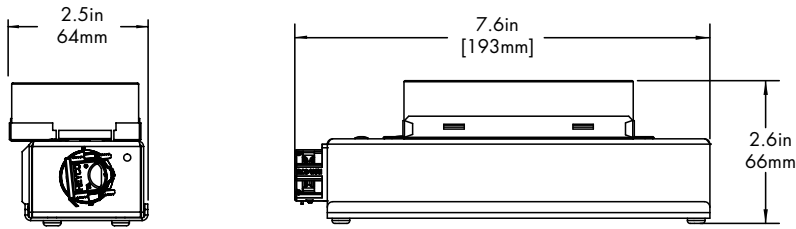


Canopy	+	Driver
RTL or RD	+	010L or 010G
RTL or RD	+	010S
RTL	+	010L or 010G or 010S
RTL or RD	+	DALI or LUTE

### HRM Single

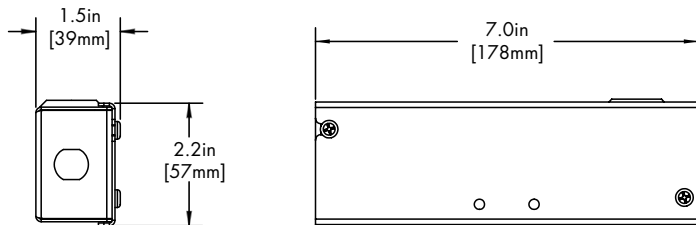

Canopy	+	Driver
RTL	+	PHSD


### HRM Double

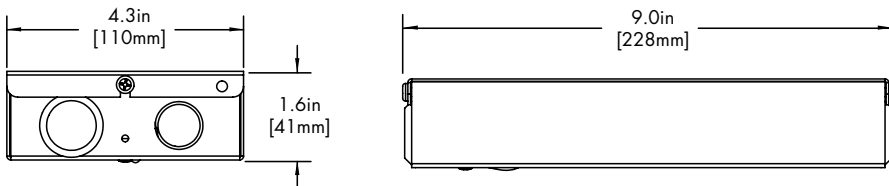

Driver
DALI8
DMX

### EMG Emergency Driver

120 minute EMG operation time.

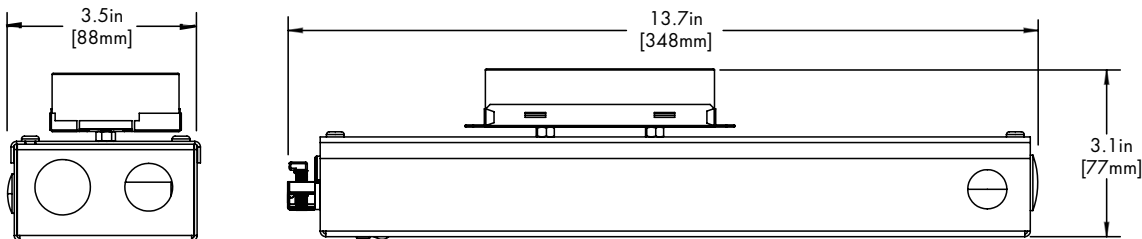

Driver
EMG

# LETO 11

SUSPENDED ASYMMETRIC LED CYLINDER

## Standard Colors

**BK**  
Black



**WH**  
White




**SL**  
Silver



## Premium Colors


**MA**  
Mocha




**CC**  
Charcoal



**CR**  
Cerulean




**FB**  
Firebrick



## Two Tone Finishes


Inside finish refers to Baffle Finish selection from page 1. Any combination may be used for baffle and body finishes.



## TM-30

**2500K**


COLOR VECTOR GRAPHIC

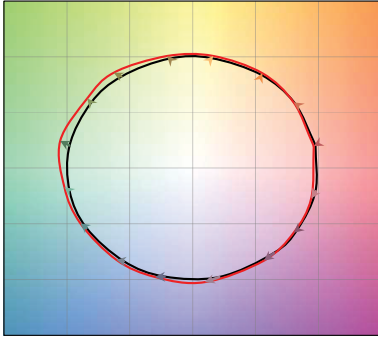

— Reference Source — Test Source

**2700K**


COLOR VECTOR GRAPHIC

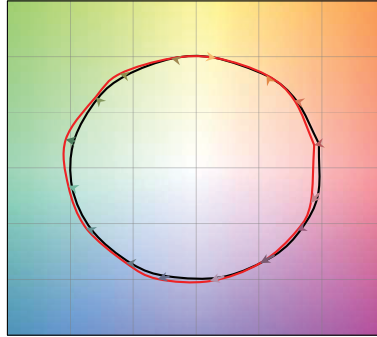

— Reference Source — Test Source

**3000K**

COLOR VECTOR GRAPHIC

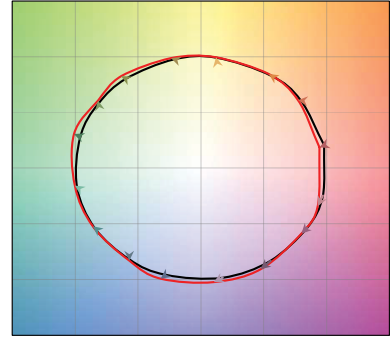

— Reference Source — Test Source

**3500K**


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

**4000K**


COLOR VECTOR GRAPHIC

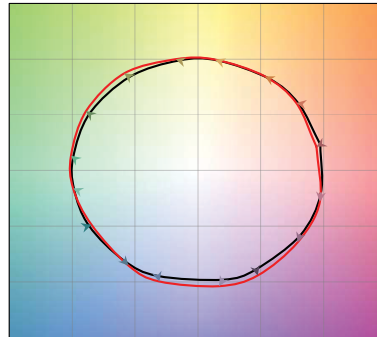

— Reference Source — Test Source

**6500K**

COLOR VECTOR GRAPHIC

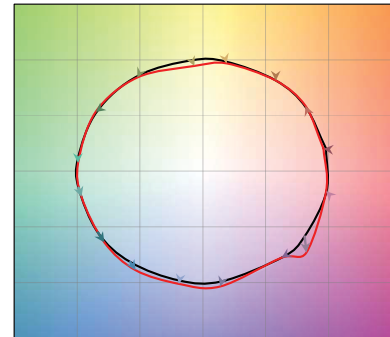

— Reference Source — Test Source

## Photometry

**18° Faceted Reflector**

